
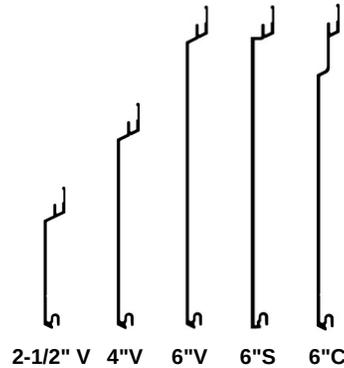
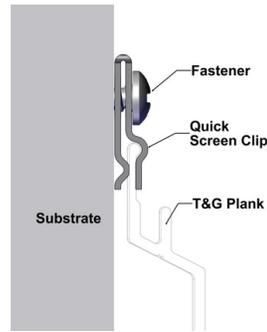


# TONGUE & GROOVE PLANKS

## INTERIOR WALL SYSTEM

the DOUGLAS

### TYPICAL ISOMETRIC

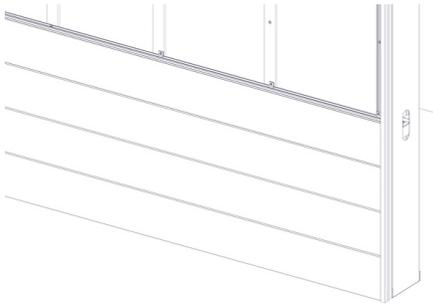

### PROFILES

V-Groove: 2-1/2", 4", 6"  
 Smooth: 6"  
 Channel: 6"  
 Standard Lengths: 24', 2-1/2"(12')  
 96 SQ FT/box

### COMPONENTS - Standard Lengths: 12'

**Traditional:** Back-to Back Starter, Starter Strip, 2"  
 Corner Set, 1-3/8" Two Piece J-Track, 1-3/8"  
 Termination Set, Compression Joint (24'), 1-1/2" Flat  
 Reveal Set, 1-1/2" U-Reveal Set, 1-1/2" T&G U-  
 Reveal, 2" Offset Flat Reveal

**Craftsman:** 3/4" Inside Corner, 1" Outside Corner, 3/4"  
 U-Reveal Set, 3/4" T&G U-Reveal

**Precision:** 5/8" Starter J-Track, 3/16" Outside Corner,  
 5/8" J-Track, 5/8" Two Piece J-Track, 5/8" Termination  
 Set, 1/2" Flat Reveal, 1/2" T&G Flat Reveal

### FINISHES

Woodgrains, solid color, naturally aged metal, custom solid colour matching  
 (additional lead times apply)

### ATTACHMENT

Planks: Quick-screen clips w. #8 Pan Head screws\* @ 32" o.c. (standard).  
 Quick-screen clips included: 135 pcs/4" box, 90 pcs/6" box.  
 Trims: hard fasten w. #8 Pan Head screws\* @ 16" o.c. \*Screws not included.

### BIM & CAD

RVT & DWG files available, see  
 website for details

### LEAD TIME

Most Popular Finishes  
 -ready to ship within 1 week  
 Additional Finishes  
 -ready to ship within 14 weeks

### TECHNICAL SPECIFICATIONS

#### PHYSICAL DATA

6063-T5 Extruded Aluminum  
 100% Recyclable  
 Warranty: Finish:15 year (standard)/20 year\* (ultra) (\*10 week lead time);  
 Aluminum: 50 year  
 Weight (lbs/sqft): ~1.5

#### TESTING

ICC-ESR 4182 Evaluation Report - Division: 07 00 00 Thermal and Moisture  
 Protection Section: 07 46 00 - Siding

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES  
 reports as proof of compliance

Impact testing: TAS 201



**Fire Rating:** Class A Non-Combustible by ASTM E136 & ASTM E84 ;  
 A2-s1,d0 by EN 13501-1



**Light Reflectance:** 5% (Black) up to 73.2% (Ultra White)



[info@longboardproducts.com](mailto:info@longboardproducts.com)  
[longboardproducts.com](http://longboardproducts.com)  
 800 604 0343




**LONGBOARD**<sup>®</sup>  
ARCHITECTURAL PRODUCTS

Interior

# Tongue and Groove Walls

Installation Guidelines

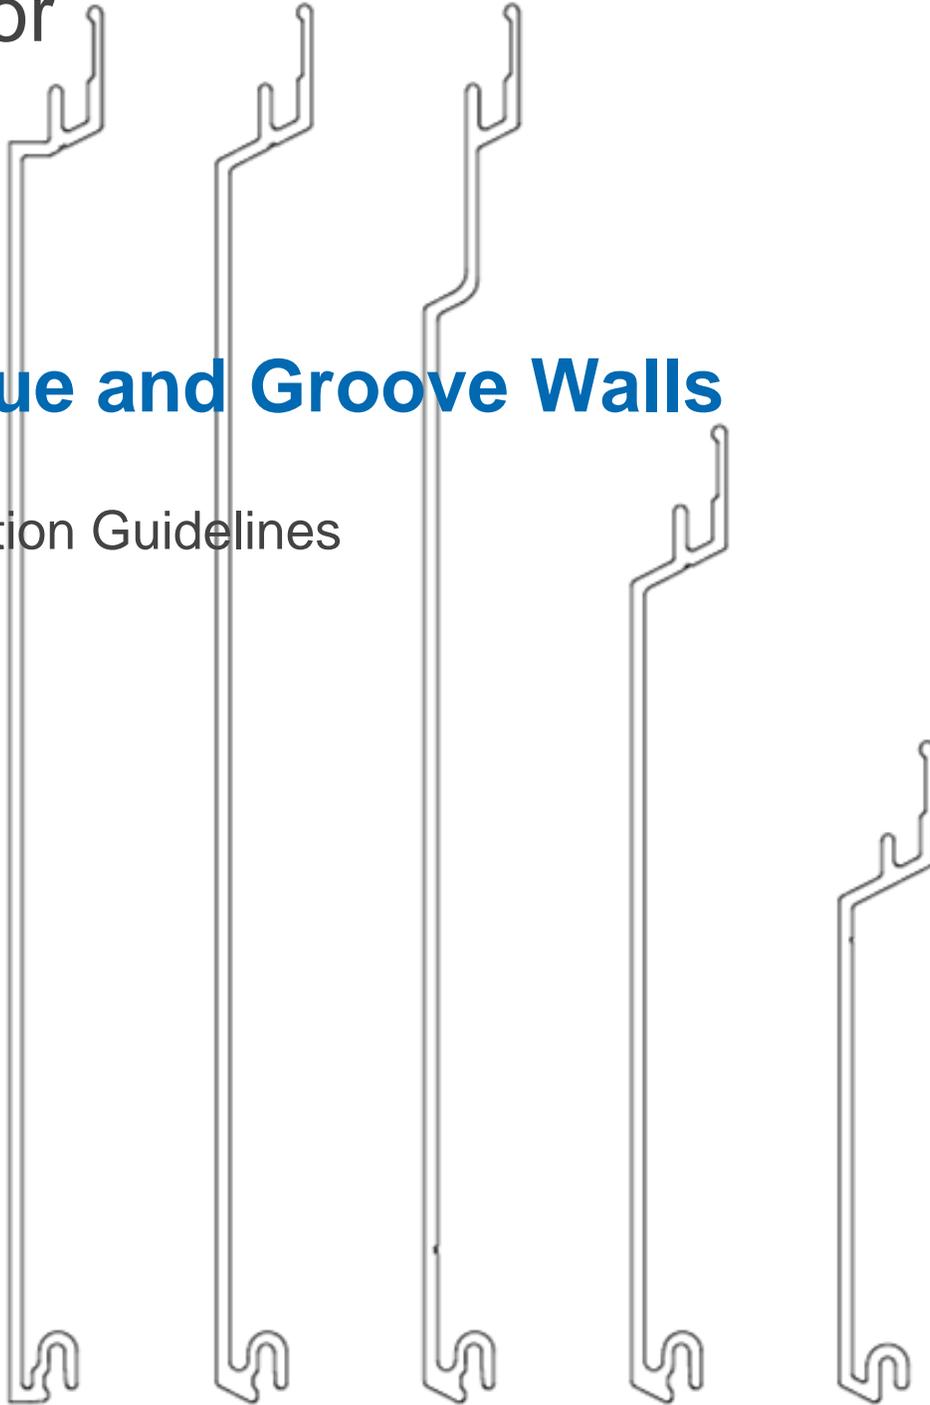

## Table of Contents

<b><u>Product Description</u></b>	<b><u>3</u></b>
<b><u>Material Specifications</u></b>	<b><u>3</u></b>
Surface finishes	3
Expansion and contraction	3
Material ordering and deliveries	4
Storage and handling	4
Cleaning	4
Warranty	4
<b><u>Components/Tools</u></b>	<b><u>5</u></b>
Tools/equipment and hardware	5
Component images and descriptions	5
<b><u>System Install</u></b>	<b><u>6</u></b>
<b>Install considerations</b>	<b>6</b>
Install techniques/tips/details	6-8
Cutting	9
Fastening	9
Fastener types	9
Framing requirements	10
<b>System layout</b>	<b>11</b>
Perimeter and field area limitations	11
Install perimeter components	12
J-Track	12
Termination Set	12
Starter Strip	12-13
Corners	14
Install field components -Floor elevations	15
Install field components -Exp. Reveal	16
Install plank components	17
Horizontal plank steps	17-18
Vertical plank steps	19-20
Final Steps	21
<b><u>Appendix</u></b>	<b><u>22</u></b>
Tables - Expansion & contraction	22
Tables - Quick Screen clip/wind load	23
Handling and care of products	24
Blank page	25
Contact Info	26

## Product Description

Longboard® architectural products are extruded aluminum systems for high performance building facades and decorative elements. These streamlined systems are integrated with existing building materials and designed for many applications. Longboard encompasses a naturally beautiful finish while providing a premium quality material designed to be installed horizontally or vertically. Longboard products are available in standard lengths and widths for typical styles of cladding and specific architectural products.

## Material Specifications

### Surface Finishes

Longboard Products are available in a wide range of woodgrains and solid colors varying in color and tone to suit your aesthetic look. Custom solid colors are available upon request.

Longboard woodgrains have a repeat pattern, shipped in sets mated back-to-back in each box. Install these as they come out of the box, as an A&B pattern staggering each plank approx. 1-2' (305-610mm) from the previous plank to achieve a random pattern aesthetic.

All Longboard Products are produced 1" (25mm) oversized, as one end is drilled for the coating process and both ends have 1/2" (12mm) of masking tape (woodgrains only) which must be cut off for best results.

### Expansion & Contraction

Planks & components expand & contract 1/4" (6mm) over 24' (7.3m) in all directions, measured over a 30°C (54°F) temperature range. Due to this range of movement, the following expansion components should be installed parallel and perpendicular every:

#### Horizontal Install

- 24' (7.3m) max<sup>1</sup> <sup>2</sup> Perpendicular to Planks: Traditional Flat Reveal Set, Traditional U-Reveal Set  
Parallel to Planks (at each floor elevation): Compression Joint

#### Vertical Install

- 24' (7.3m) max<sup>2</sup> Parallel and/or Perpendicular to Planks: Traditional Flat Reveal Set, Traditional U-Reveal Set, J-Tracks back to back

<sup>1</sup>Note: 40' (12.2m) max if using staggered butt-joints.

<sup>2</sup>Note: Through-wall flashing (where required) at every floor elevation.

#### Other options (Perpendicular to Planks only)

- 12' (3.7m) -Craftsman U-Reveal Set
- 6' 8" (2m) -Precision Flat Reveal

When using expansion components, each plank must terminate into a minimum of one (1) component to allow for expansion & contraction.

**See: Appendix for tables of expansion/contraction calculations per foot/meter of material.**

## Material Ordering & Delivery

---

- Packaging: Planks are sold in box quantities:  
6" V-Groove, 6" Channel & 6" Smooth: 96 SQ FT/Box (8/24's) w. 90pcs Quick-Screen Clips included  
4" V-Groove: 96 SQ FT/Box (12/24's) w. 135 Quick-Screen Clips included  
Components are sold individually by the 12' (3.7m) length.

---

- Shipping: Lead time is 3-6 business days\* + shipping (*\*subject to change*), delivered on 24' (7.3m) long skids weighing up to 2000 lbs. A mechanical lift with forks is required on site to receive the order.

---

- QC: Always inspect the delivery for damage and contact LB ASAP if there are any issues: [info@longboardproducts.com](mailto:info@longboardproducts.com) or 1-800-604-0343 and include your PO# and any pictures if possible. Mark the delivery receipt as "damaged" and accept the delivery as-is. Longboard is not responsible for the installation of blemished or damaged material.

## Storage & Handling

Be sure to store the material flat, keep it dry, safe & secure and remain in unopened cartons until ready to be installed.

**See Appendix for proper handling and care instructions.**

## Cleaning Recommendations

While Longboard finishes require zero maintenance, we do recommend periodic cleaning to keep the product looking its best. Our finish is tested to withstand corrosion, fading and normal wear, however, neglect and rough conditions could have negative effects on the surface finish. Your Longboard products should be cleaned immediately after installation. See the cleaning guide for our suggestions based on soil level. Basic methods use a combination of moderate water pressure, soft sponge/brush and a mild detergent.

**\*see *Cleaning Guide for full requirements:*** [longboardproducts.com](http://longboardproducts.com)

**⚠** NEVER use aggressive acid or alkaline cleaners on Longboard finishes. Do not use cleaners containing Trisodium Phosphate, Phosphoric Acid, Hydrochloric Acid, Hydrofluoric Acid, Fluorides or any other compound that is known to react with metal.

Always follow the product instructions for dilution. Cleaning the surface with a cleanser that is not diluted may result in damage to the coating.

## Warranty

Upon substantial completion of the project, register for warranty online here: [longboardproducts.com/warranty](http://longboardproducts.com/warranty)

**⚠** Registration is required for the warranty to be in effect.

## Components/Tools


### Tools/equipment/hardware

Use standard wood-cutting tools such as a Table Saw & Miter Saw with a carbide blade (60-80 tooth) for non-ferrous metals (aluminum), Jig Saw, Hole-Saw & drill for attachments.

Recommended to use standard 2" - #8 panhead screws supplied by the installer.

### Component images and descriptions (Typical)

Longboard systems consist of many components used in conjunction with each other to create a dynamic seamless look. For all LB components go to [longboardproducts.com](http://longboardproducts.com).

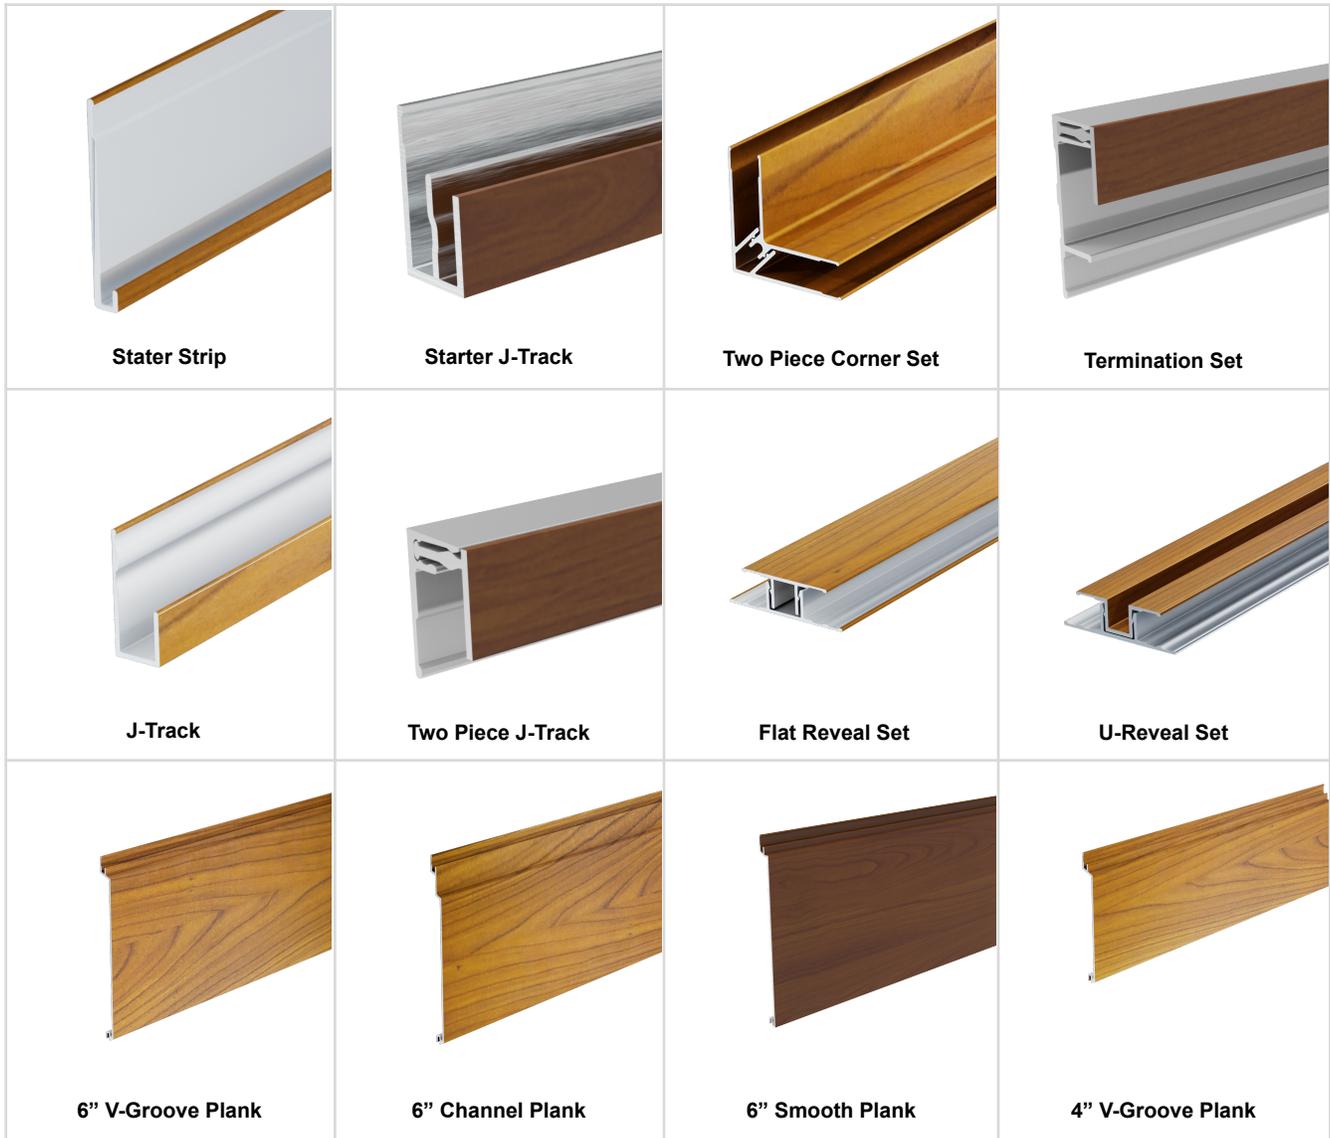


## System Install

### Installation considerations

- Longboard system typical dimensions:
  - Planks and components total depth - 9/16" (15mm)
  - Planks - 1/2" (12mm)
  - Curved walls: - 15' (4.6m) min radius  
(tighter radii contact Longboard)
- Longboard Products are not recommended for use on marine applications in direct contact with salt water.
- Longboard Cladding is to be installed outboard of a weather resistant barrier, including all flashings, following code and building requirements.


### Install techniques/tips/details

- It is good practice to leave a 1/4" (6mm) gap between every 2nd perimeter component joint or 24' (7.3m) to allow for expansion & contraction. Consider the joints where components meet each other to dictate which component is installed first (eg: right angle butt joints, mitered joints etc.).
- Quick-Screen Clips allow for free movement of the planks, to expand & contract during thermal changes.

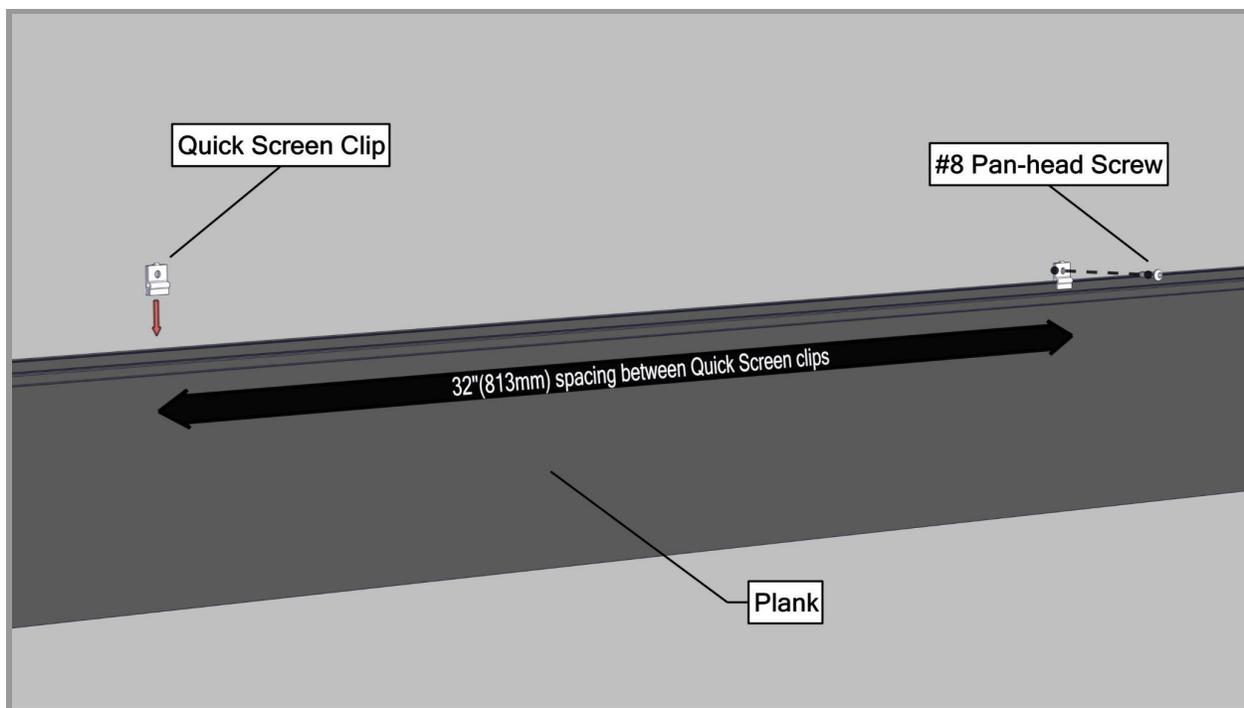


- **⚠ BUTT-JOINTS.** When installing staggered butt-joints, hard-fasten the two planks at the butt-joint to ensure joints do not open up (**See Detail A, B & C**). Fasteners should be anchored into a solid secure framing member, blocking, furring strip or backer plate, etc.
- If needed, use touch-up paint pens (purchased separately) to finish the ends of the two (2) planks at the butt-joint.
- DO NOT install more than one (1) butt-joint between two components
- DO NOT hard-fasten a plank to a component trim (except Precision outside corner), as this will restrict its ability to expand & contract into the component.
- If no butt joints along the length, it is good practice to hard-fasten each plank directly through the flange near the center, to keep the planks from migrating.
- \*When using the Precision Outside Corner, miter the end of the Planks to fit tight to the Corner. Secure by hard fastening at the mitered end into the flange of the Corner to ensure joints do not open up.
- Butt-joints are not permitted when using the Precision Components, and components should be installed every 6' 8" (2m) max.
- DO NOT hard-fasten more than one (1) location per plank.
- Fasten only:


Situation	Location
No butt-joints:	-Center of planks
Butt-joints:	-At the joints
*Precision Outside Corner w/no butt joints:	-At the Corner

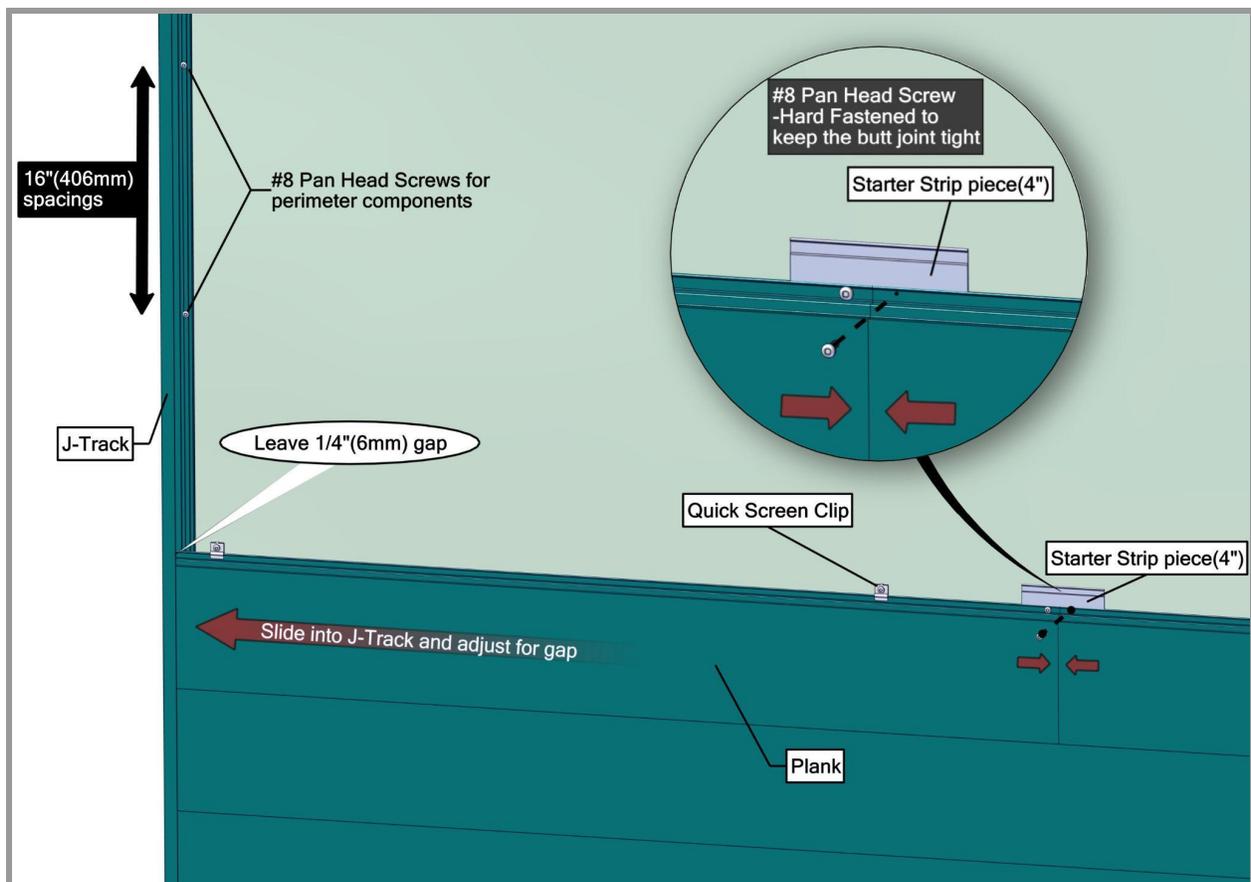

**Detail A**

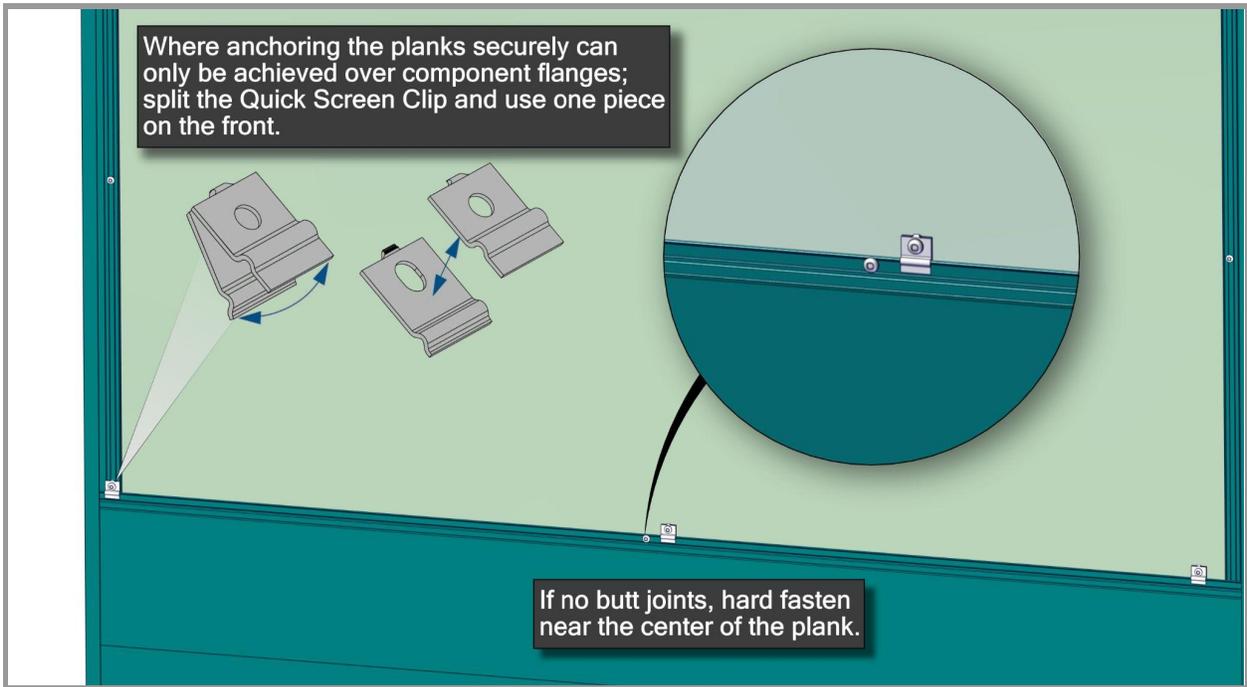

**Detail B**

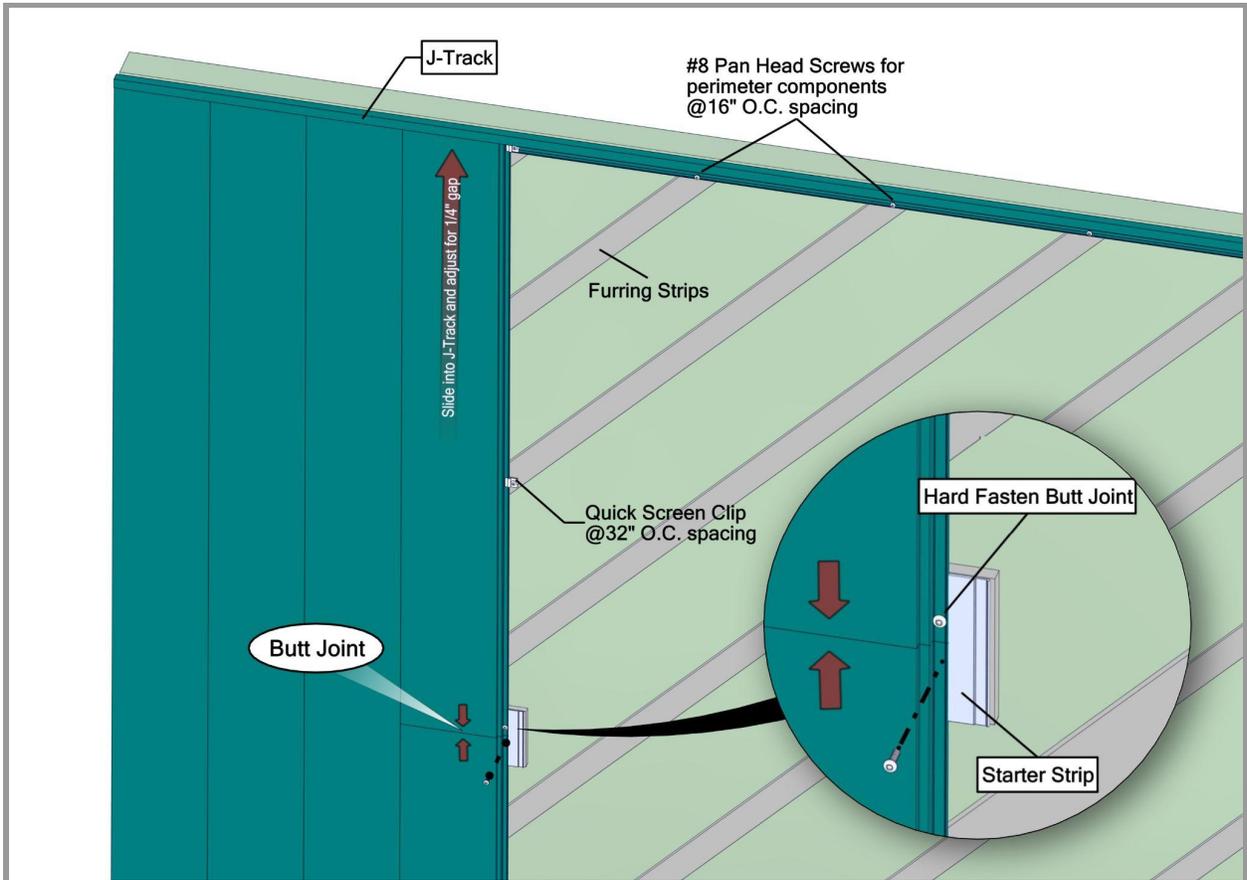

**Detail C**

## Cutting

⚠ Always be sure to wear appropriate PPE: eye & hearing protection.

Cut planks using specified Miter Saw to terminate to accurately measured distances between components and subsequent planks allowing for expansion & contraction. Trim the taped/drilled ends of all stock length material by at least 1/2" (12mm) each end and discard.



## Fastening

Fasteners must be corrosion resistant and comply with all local building codes.

⚠ All fasteners should be suitable for exterior use and be compatible with the substrate type.

**Fasteners should be anchored into a solid secure framing member, blocking or furring strip. For vertical applications when the framing member is not available, install diagonal furring strips to securely fasten planks.**

**Perimeter components** should be hard-fastened every 16" (406mm) O.C. directly through the flange using #8 pan-head screws (supplied by others). These components should be fastened within 8" (203mm) of the end for secure fastening.

**Planks & starter components** are secured using Longboard **Quick-Screen Clips** fastened to the substrate every 32" (813mm) O.C. using #8 pan-head screws (supplied by others). The Quick-Screen Clips are included in the order for 32" (813mm) spacings.


See **Appendix for project specific fastener spacing:**

**Quick Screen Clip - Wind Load Tables 3 & 4**


## Fastener types

### RECOMMENDED

Pan-Head Truss-Head

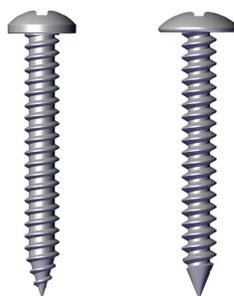


### CORRECT

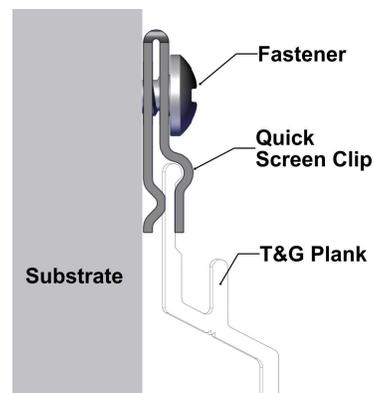


### DO NOT USE

Flat-Head Oval-Head

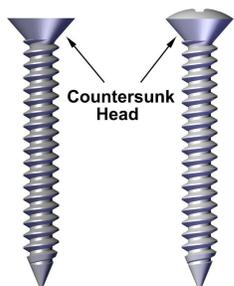

### INCORRECT

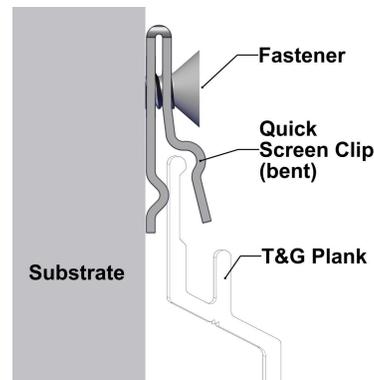

### Framing requirements

Always consult the local building authority and follow local building code requirements. The Longboard T&G Cladding system typically weighs approx. 1.5lbs/sq.ft.

#### **Wood Framing**

- Size: 2x4 minimum
- Spacing: 16" (406mm) O.C. (see Appendix Table 3 & 4 for reference)
- Sheathing: Exterior grade minimum 7/16" (11mm) plywood/OSB or equivalent exterior wall sheathing.

#### **Metal Framing**

- Gauge: 20 ga. minimum (see Appendix Table 3 & 4 for reference)
- Spacing: 16" (406mm) O.C. (see Appendix Table 3 & 4 for reference)
- Sheathing: Exterior grade minimum 7/16" (11mm) plywood/OSB or equivalent exterior wall sheathing.

#### **Concrete/CMU**

Wood or metal furring is required over concrete and CMU.

##### Wood Furring:

- Size: 2x2 minimum
- Type: Pressure treated lumber
- Spacing: 16" (406mm) O.C. oriented vertically

(see Appendix Table 3 & 4 for reference)

##### Metal Furring:


- Size: 20 ga. minimum (see Appendix Table 3 & 4 for reference)
- Type: Hat channel, c-stud, or z-furring.
- Spacing: 16" (406mm) O.C. oriented vertically  
(see Appendix Table 3 & 4 for reference)

## System layout


### Perimeter and field area limitations

Measure and layout your wall area to consider plank & component alignment with fixtures, penetrations and adjacent walls, for desired appearance (Traditional Components used for illustrative purposes). The same methodology applies for vertical installations.


Seamless runs up to 24' length planks (no butt-joints)

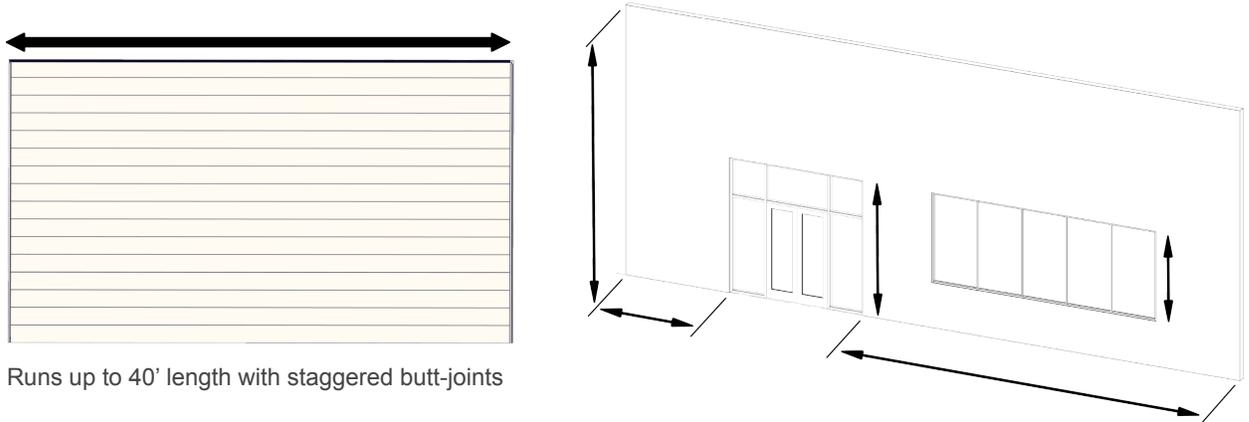


Runs up to 40' length with staggered butt-joints

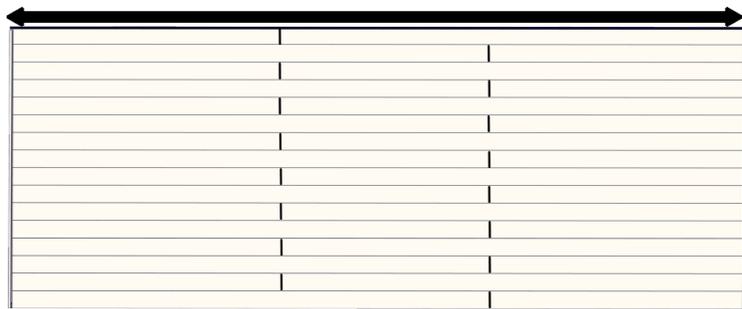

Runs greater than 40' length, use a Reveal set to divide field areas.

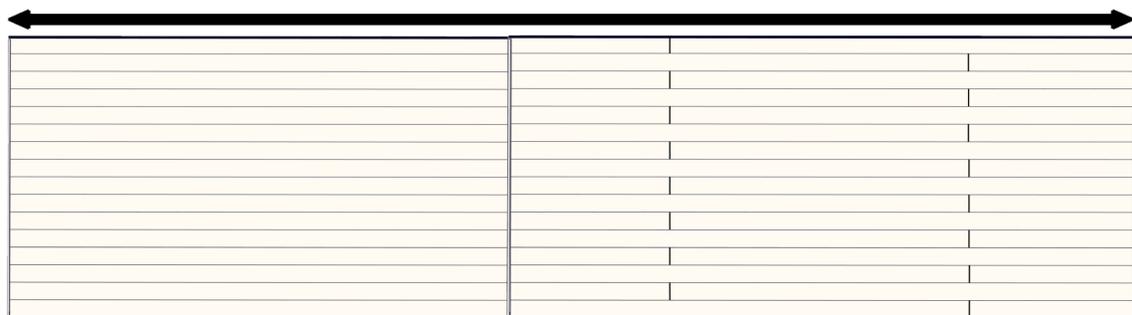

Install perimeter components

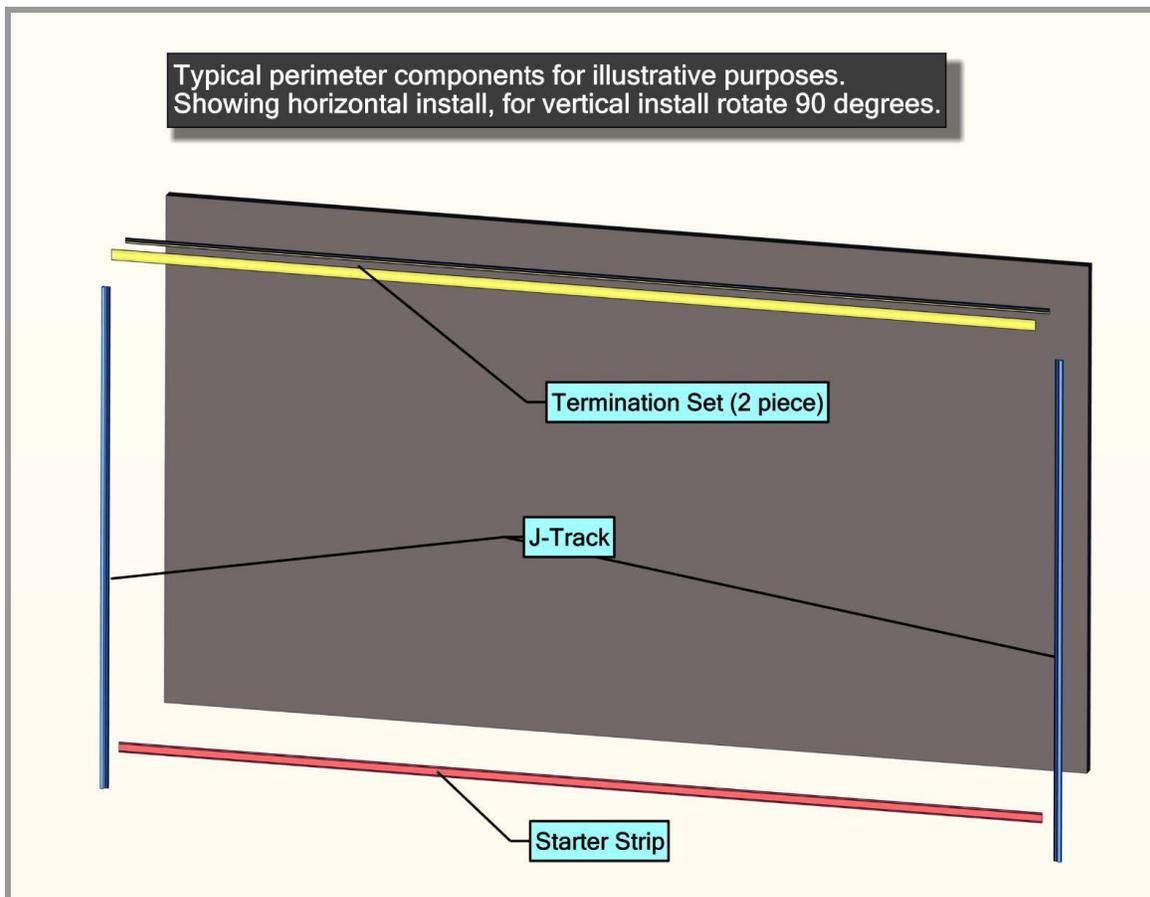


---

**J-Track/Two Piece J-Track**

Type: J-Track or Two Piece J-Track  
 Location: Perpendicular to Planks (eg: sides of windows and doors), along gable end walls, other angled conditions, window/door headers and other penetrations.  
 Details: Notch the flange at the ends where they meet corner components.

---

**Termination Set**

Type: Termination Set  
 Location: Parallel to Planks along top of wall, underside of windows (horizontal cladding only), sides of windows/doors (vertical cladding only) and other penetrations.  
 Details: Install base only to start and end cap once planks are installed.


---

**Starter/Starter J-Track**

Type: Starter or Starter J-Track  
 Location: Typically along the bottom of the wall(s) for horizontal installs or starting at one side for vertical installs (two starter strips can go back to back in the center of an area to even out planks).  
 Details: Can go back to back for vertical installs at the center of each cladding area for equal width ends.


---

For vertical installs only, install Starter strips back to back then connect the first plank on both sides.

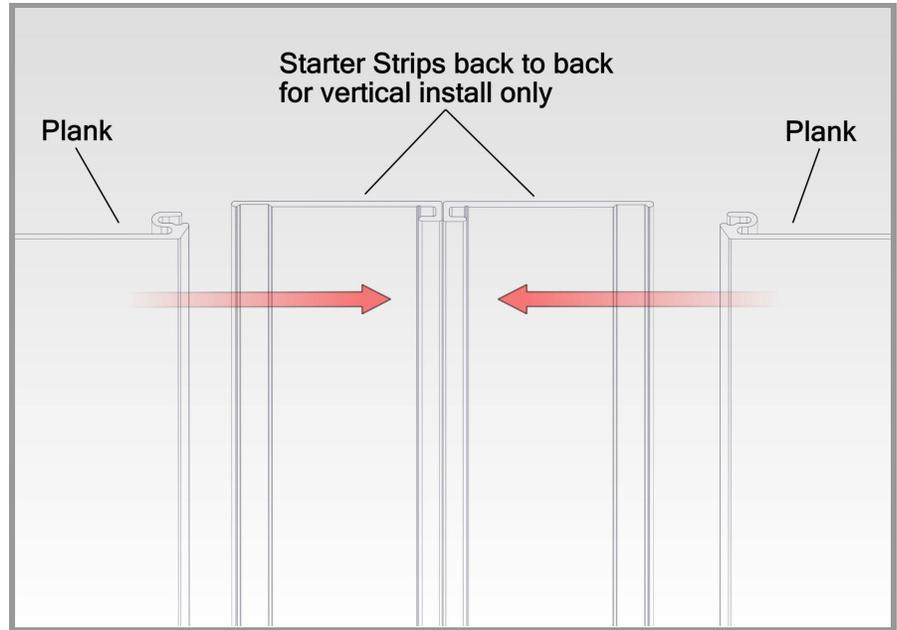

Install vertical back to back Starter strips in the center of wall areas for even layout and symmetry. Continue the planks to the termination end of the install.



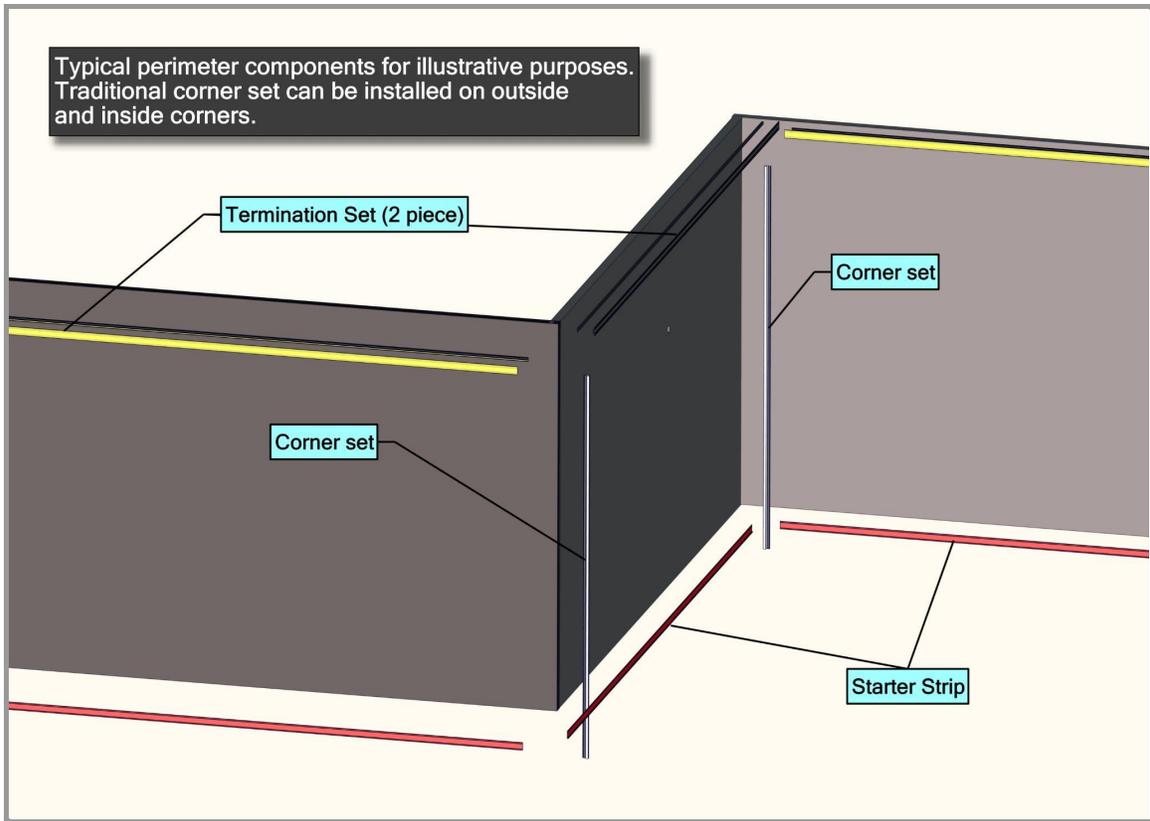


---

### Corners

Type: The Traditional Corner Set (2 piece system).


Location: Inside & outside corners of the area of application.

Details: Typical corner set, also recommended for vertical cladding installs.

---

Install field components -Floor elevation


Compression Joint

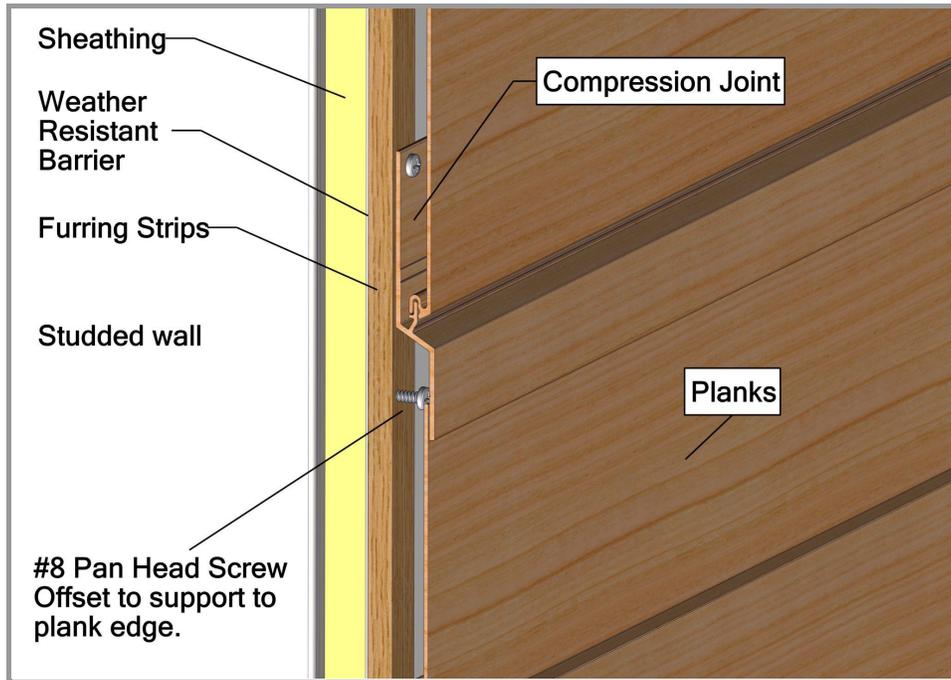


**Floor elevation**

Type: Compression Joint, Termination set/Starter J-Track, J-Track back to back.  
 Location: Typically at every floor elevation and where through-wall flashing is required.  
 Details: Note the orientation of planks for through-wall flashing install.

Through-wall Flashing



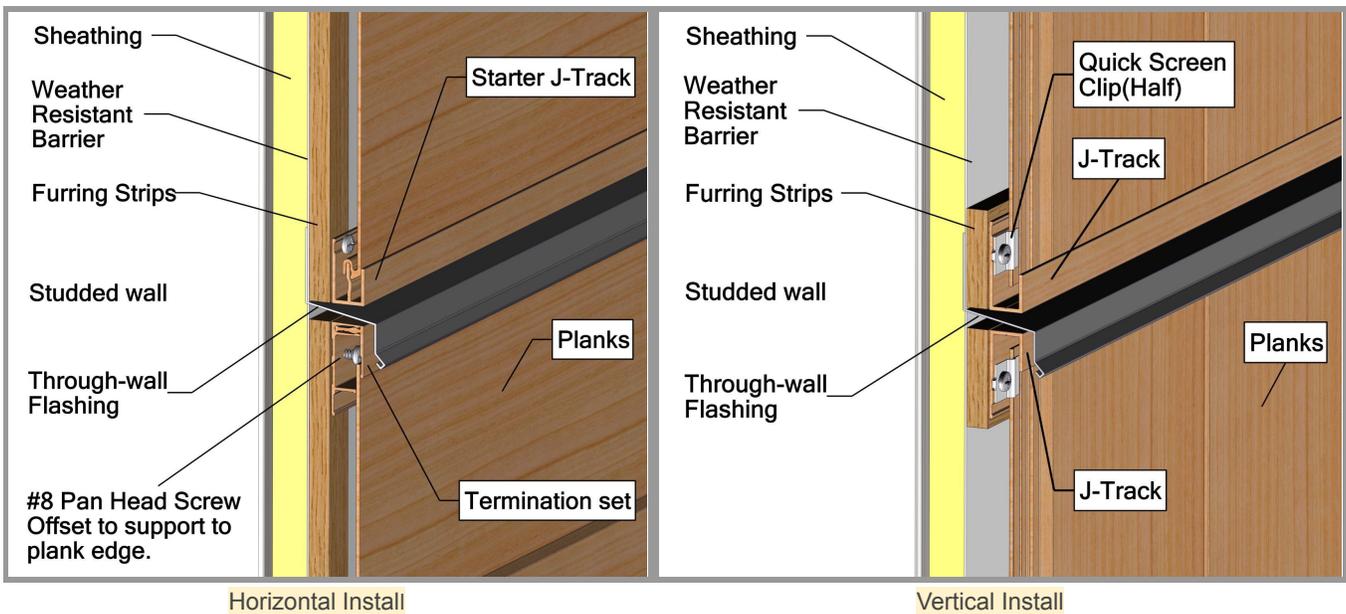


Install field components -Expansion reveal

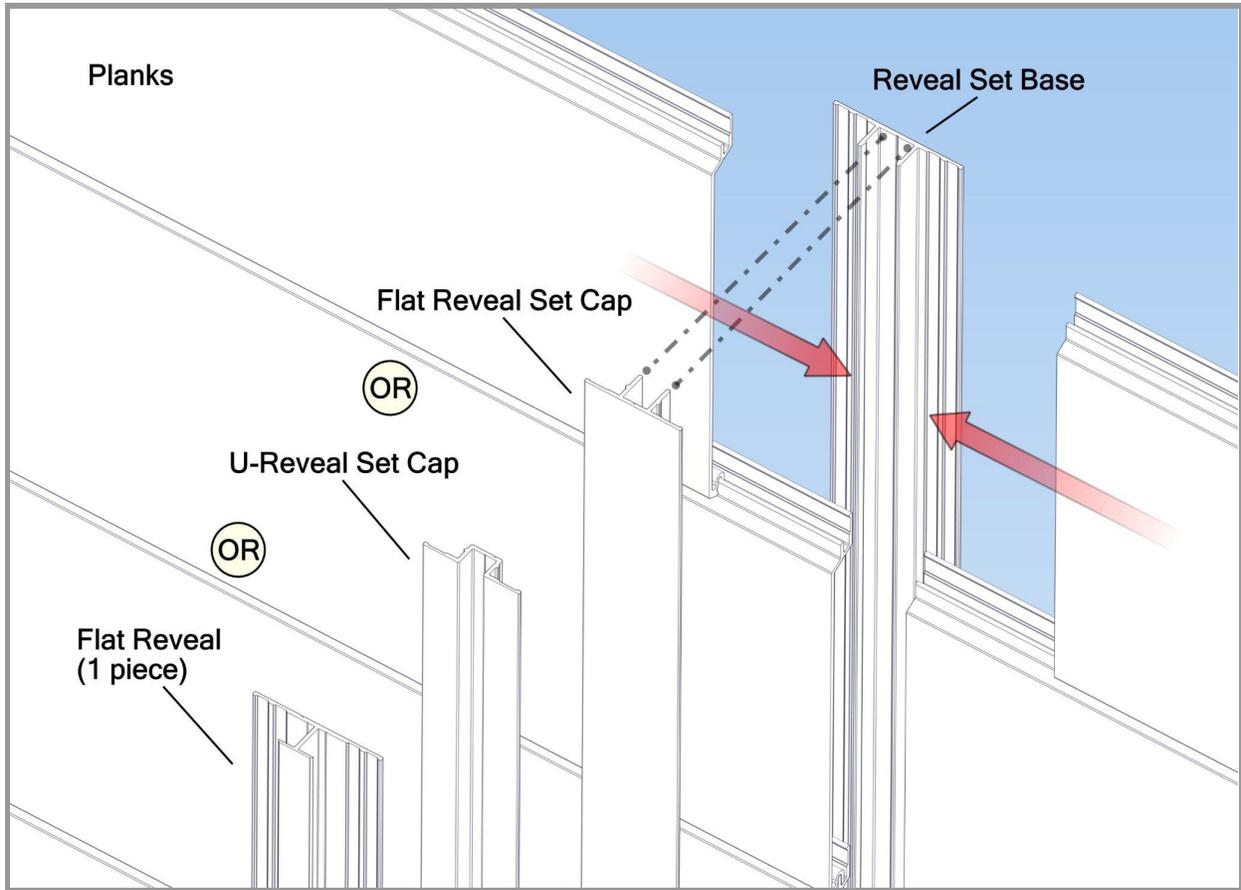

**Expansion Reveal (Typical)**


- Type: Traditional Flat Reveal Set/Traditional U-Reveal Set/Precision Flat Reveal.
- Location: Typically for wall areas greater than 24' (7.3m) long (no butt-joints) or 40' (12.2m) long (with staggered butt-joints). See **Expansion and contraction** for details.
- Details: Install base only to start and end cap once planks are installed.

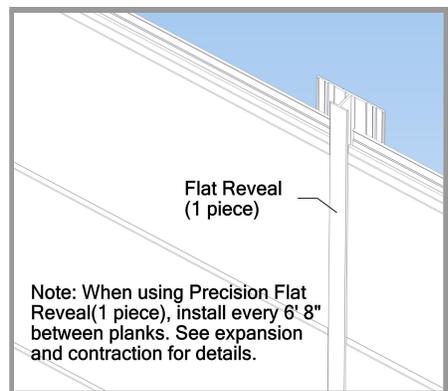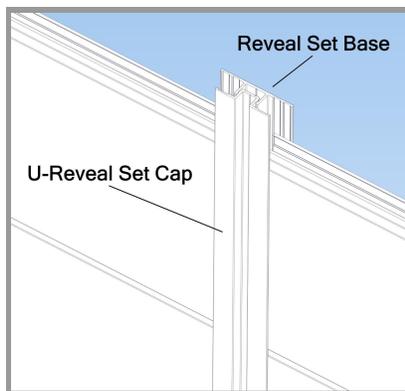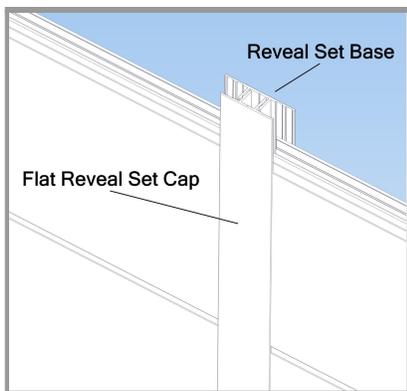


Install plank components

**Horizontal**

**Step 1 -Placement of the plank into the trim.**

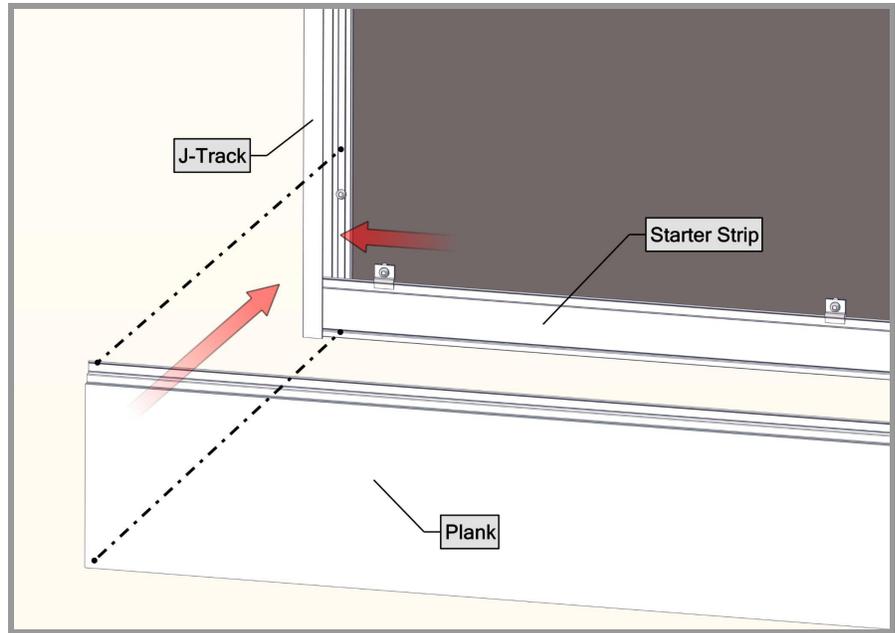

**Step 2 -Secure the fit and adjust for the gap (expansion and contraction).**

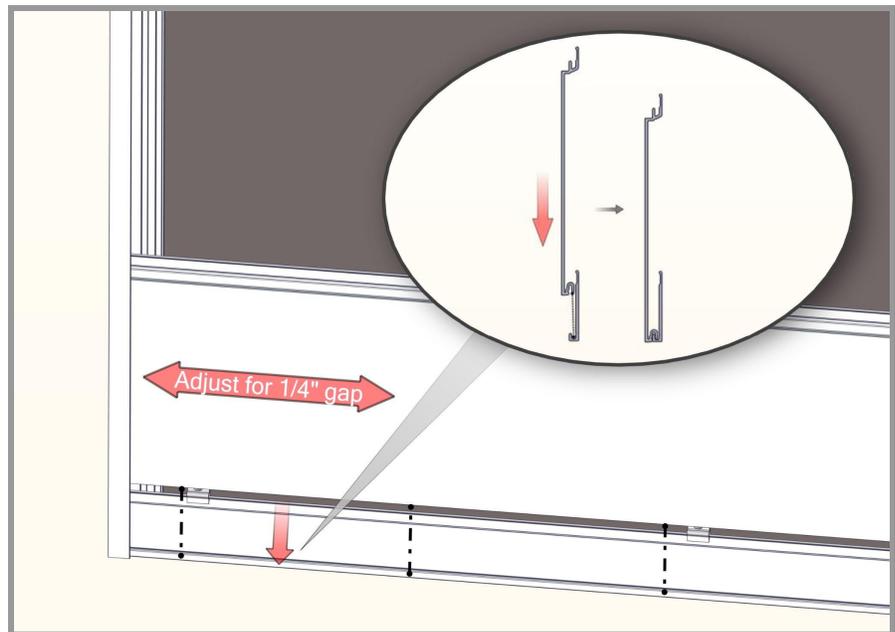

**Planks**

Type:

V-groove, Channel, Smooth plank.


Location:

Starting the first row of planks, engaging with the tongue of the Starter or Starter J-Track.


Details:

Check for a level installation, shim Quick-Screen Clips where needed to correct any substrate inconsistencies. It is good practice to check your installation every 2-3 rows for level/plumb and flat/straight, for best results.

**Step 3 - Install Quick Screen Clips every 32" (813mm) O.C. spacing to secure the top of the planks. Hard fasten only one point at the center of each plank, except where butt-joints are used. See Install techniques for Hard fastening tips.**

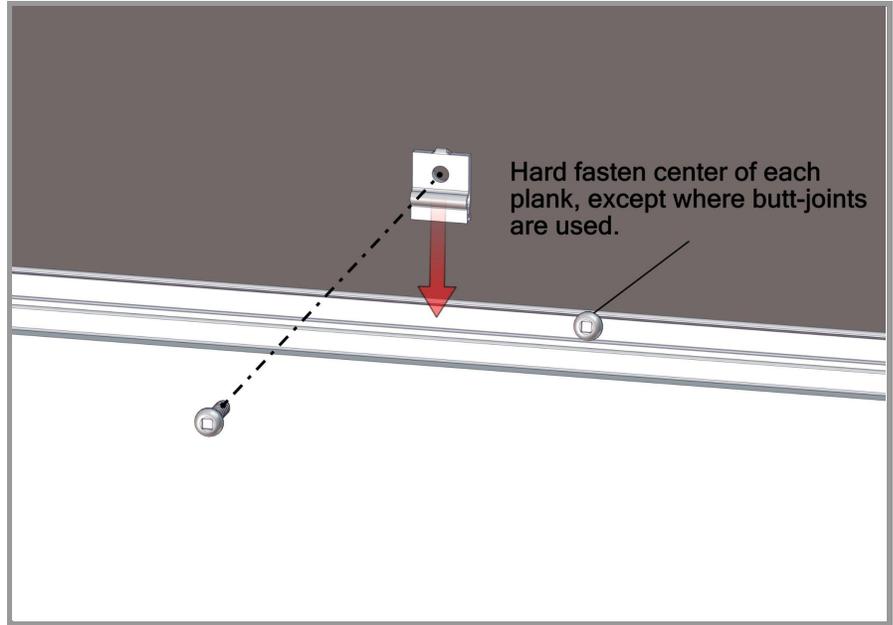


**Step 4 - Install planks as needed. Review install techniques for further details and tips.**

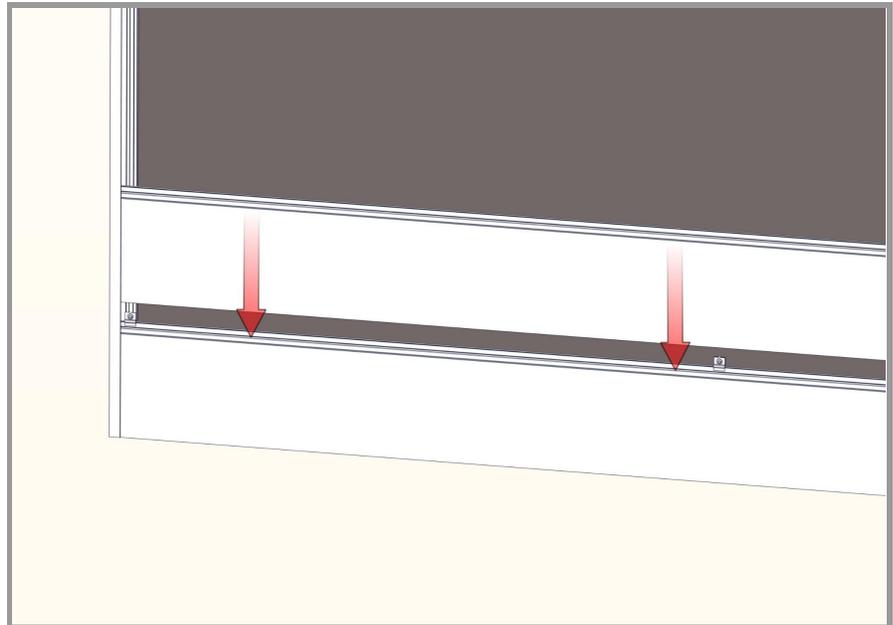


Install plank components

Vertical

Step 1 -Placement of the plank into the trim.

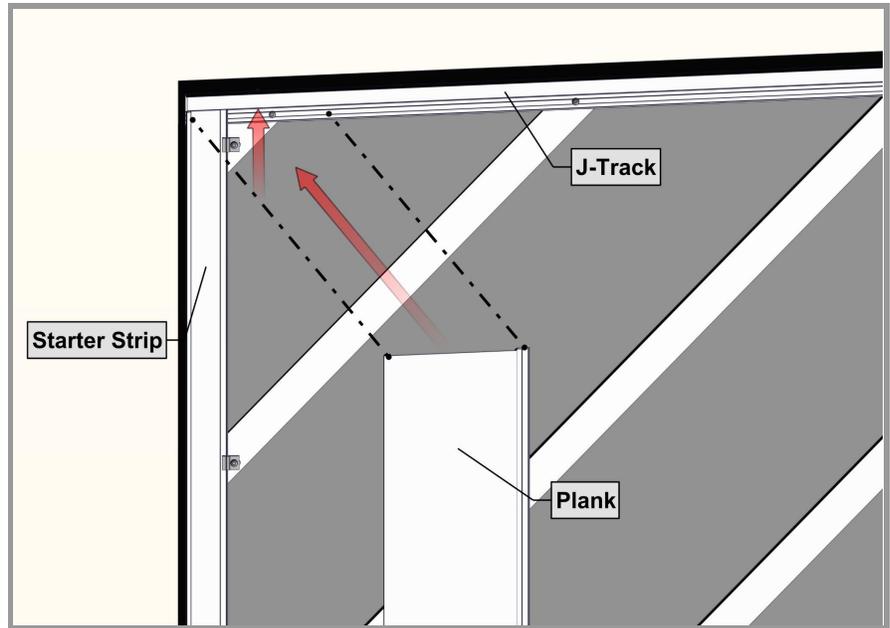

Step 2 -Secure the fit and adjust for the gap (expansion and contraction).

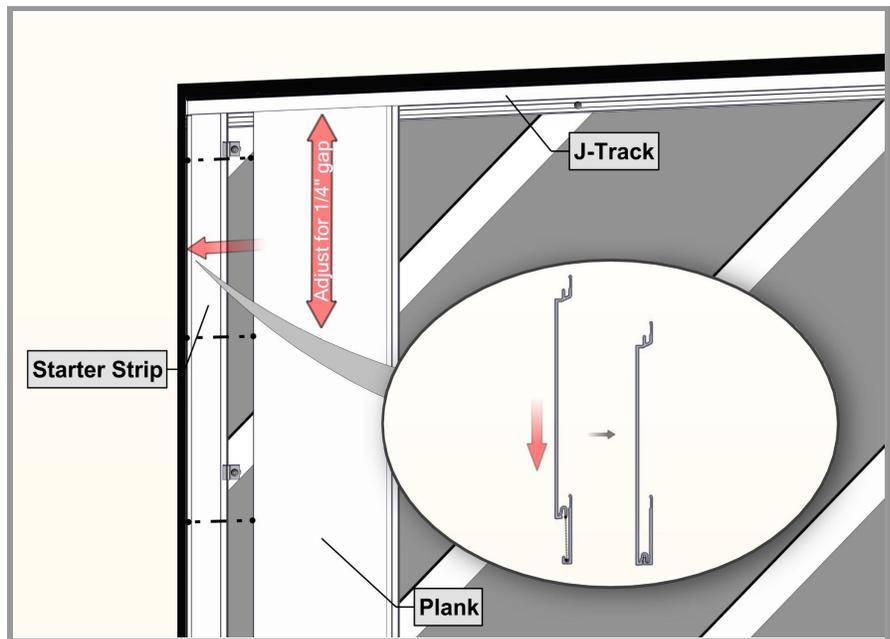


**Planks**

Type: V-groove, Channel, Smooth plank.


Location: Starting the first row of planks, engaging with the tongue of the Starter or Starter J-Track.

Details: Check for a level installation, shim Quick-Screen Clips where needed to correct any substrate inconsistencies. It is good practice to check your installation every 2-3 rows for level/plumb and flat/straight, for best results.


**Step 3 -Install Quick Screen Clips every 32”(813mm) O.C. spacing to secure the top of the planks. Hard fasten only one point at the center of each plank, except where butt-joints are used. See Install techniques for hard fastening tips.**

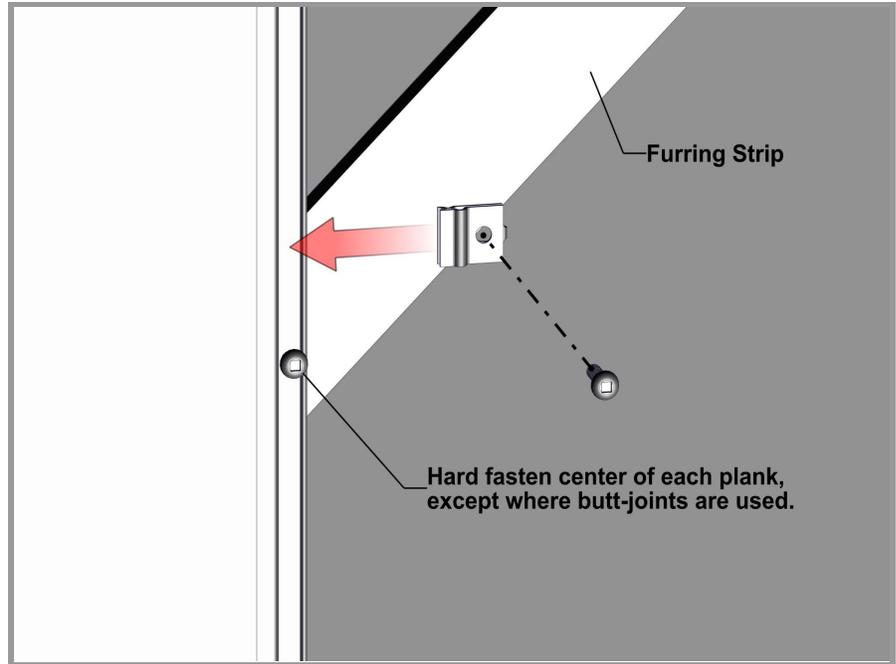


**Step 4 -Install planks as needed. Review install techniques for further details and tips.**

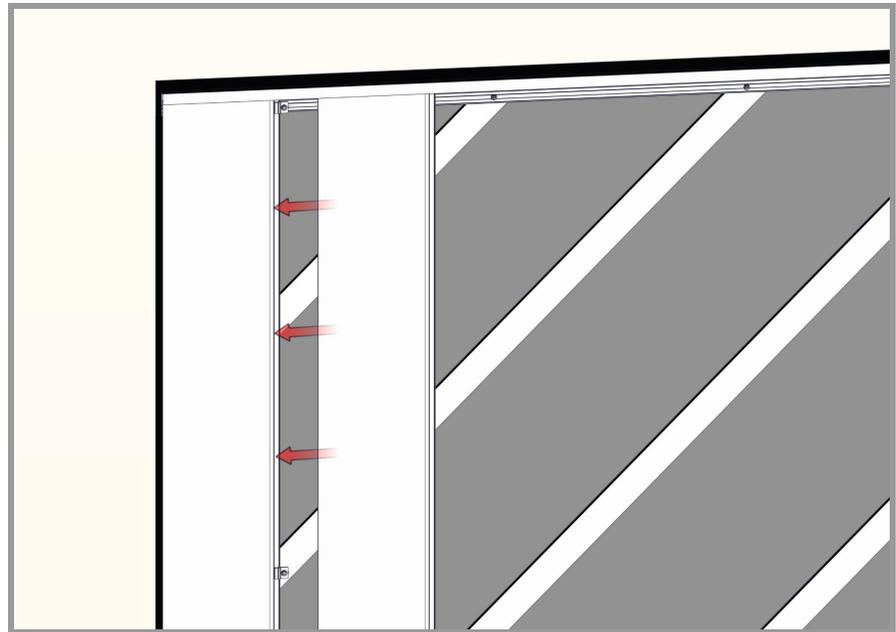

**Step 5 - Finishing off edges and angled cuts.**

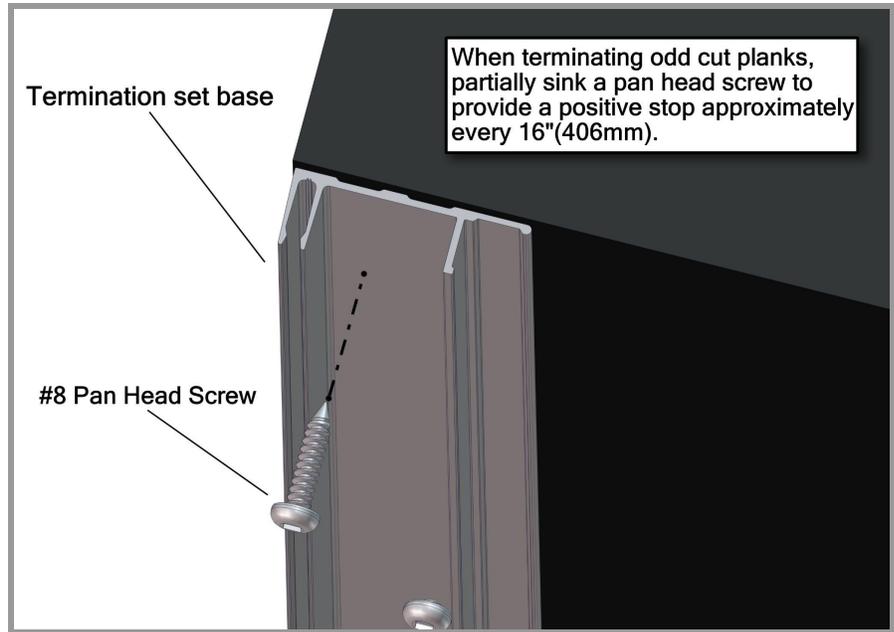

**Step 5.1 - Install edge plank with a 1/4" gap and screw to lock the plank into place.**

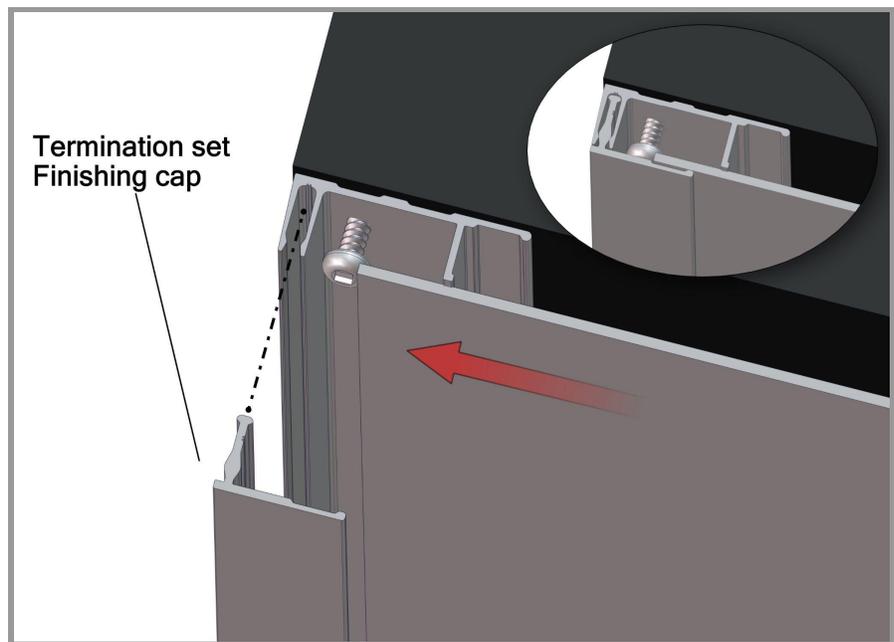

**Step 6 -Once planks are installed, finish off the perimeter trims with caps from two piece sets.**

#### Component Caps

Type:	Caps are the finishing piece of the 2 piece component sets.
Location:	Installed onto the base of the 2 piece set.
Details:	If required, use a rubber mallet or hammer and block to protect the finish during this process.

# Appendix

## Expansion and Contraction Tables

TABLE 1 - IMPERIAL

		AVERAGE TEMPERATURE AT TIME OF CUTTING & INSTALLATION											
		°C	-50	-40	-30	-20	-10	0	10	20	30	40	50
		°F	-58	-40	-22	-4	14	32	50	68	86	104	122
MIN/MAX POST CONSTRUCTION TEMP.	°C	°F	EXPANSION OR CONTRACTION (INCH/FOOT)										
	-50	-58	0.000	-0.003	-0.005	-0.008	-0.011	-0.014	-0.016	-0.019	-0.022	-0.024	-0.027
	-40	-40	0.003	0.000	-0.003	-0.005	-0.008	-0.011	-0.014	-0.016	-0.019	-0.022	-0.024
	-30	-22	0.005	0.003	0.000	-0.003	-0.005	-0.008	-0.011	-0.014	-0.016	-0.019	-0.022
	-20	-4	0.008	0.005	0.003	0.000	-0.003	-0.005	-0.008	-0.011	-0.014	-0.016	-0.019
	-10	14	0.011	0.008	0.005	0.003	0.000	-0.003	-0.005	-0.008	-0.011	-0.014	-0.016
	0	32	0.014	0.011	0.008	0.005	0.003	0.000	-0.003	-0.005	-0.008	-0.011	-0.014
	10	50	0.016	0.014	0.011	0.008	0.005	0.003	0.000	-0.003	-0.005	-0.008	-0.011
	20	68	0.019	0.016	0.014	0.011	0.008	0.005	0.003	0.000	-0.003	-0.005	-0.008
	30	86	0.022	0.019	0.016	0.014	0.011	0.008	0.005	0.003	0.000	-0.003	-0.005
	40	104	0.024	0.022	0.019	0.016	0.014	0.011	0.008	0.005	0.003	0.000	-0.003
	50	122	0.027	0.024	0.022	0.019	0.016	0.014	0.011	0.008	0.005	0.003	0.000

TABLE 2 - METRIC

		AVERAGE TEMPERATURE AT TIME OF CUTTING & INSTALLATION											
		°C	-50	-40	-30	-20	-10	0	10	20	30	40	50
		°F	-58	-40	-22	-4	14	32	50	68	86	104	122
MIN/MAX POST CONSTRUCTION TEMP.	°C	°F	EXPANSION OR CONTRACTION (MM/METER)										
	-50	-58	0.000	-0.230	-0.460	-0.690	-0.920	-1.150	-1.380	-1.610	-1.840	-2.070	-2.300
	-40	-40	0.230	0.000	-0.230	-0.460	-0.690	-0.920	-1.150	-1.380	-1.610	-1.840	-2.070
	-30	-22	0.460	0.230	0.000	-0.230	-0.460	-0.690	-0.920	-1.150	-1.380	-1.610	-1.840
	-20	-4	0.690	0.460	0.230	0.000	-0.230	-0.460	-0.690	-0.920	-1.150	-1.380	-1.610
	-10	14	0.920	0.690	0.460	0.230	0.000	-0.230	-0.460	-0.690	-0.920	-1.150	-1.380
	0	32	1.150	0.920	0.690	0.460	0.230	0.000	-0.230	-0.460	-0.690	-0.920	-1.150
	10	50	1.380	1.150	0.920	0.690	0.460	0.230	0.000	-0.230	-0.460	-0.690	-0.920
	20	68	1.610	1.380	1.150	0.920	0.690	0.460	0.230	0.000	-0.230	-0.460	-0.690
	30	86	1.840	1.610	1.380	1.150	0.920	0.690	0.460	0.230	0.000	-0.230	-0.460
	40	104	2.070	1.840	1.610	1.380	1.150	0.920	0.690	0.460	0.230	0.000	-0.230
	50	122	2.300	2.070	1.840	1.610	1.380	1.150	0.920	0.690	0.460	0.230	0.000

**TABLE 3**

4" PLANKS		PSF (Factored / Ultimate)											
		20	30	40	50	60	70	80	90	100	110	121	
QUICK-SCREEN CLIP SPACING (IN) <sup>1, 2, 3</sup>	16"	Wood											
		16ga											
		18ga											
		20ga											
	24"	Wood											
		16ga											
		18ga											
		20ga											
	32"	Wood											
		16ga											
		18ga											
		20ga											

Substrate Types: Sheathed Wood-Frame Wall w/2.0 in. lg. #8 Pan-head wood screws  
 Sheathed 16ga, 50ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws  
 Sheathed 18ga, 33ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws  
 Sheathed 20ga, 33ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws

1\_Spacing is from clip center to center  
 2\_An unfactored dead load of 1.5 psf was assumed for the cladding  
 3\_If fastening to every second stud, the attachment stud shall be staggered between adjacent runs of cladding

**TABLE 4**

6" PLANKS		PSF (Factored / Ultimate)											
		20	30	40	50	60	70	80	90	100	110	121	
QUICK-SCREEN CLIP SPACING (IN) <sup>1, 2, 3</sup>	16"	Wood											
		16ga											
		18ga											
		20ga											
	24"	Wood											
		16ga											
		18ga											
		20ga											
	32"	Wood											
		16ga											
		18ga											
		20ga											



Substrate Types: Sheathed Wood-Frame Wall w/2.0 in. lg. #8 Pan-head wood screws  
 Sheathed 16ga, 50ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws  
 Sheathed 18ga, 33ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws  
 Sheathed 20ga, 33ksi Steel Stud Wall w/#8 Pan-Head Self-Drilling Screws

1\_Spacing is from clip center to center  
 2\_An unfactored dead load of 1.5 psf was assumed for the cladding  
 3\_If fastening to every second stud, the attachment stud shall be staggered between adjacent runs of cladding

## Proper Handling of Longboard Products



To help avoid injury and product damage, Longboard products require proper handling to and from storage areas during installation. When carrying or installing any products it is recommended that they be moved or carried by at least two people with each support point approximately 4ft from the ends. **Carrying products without proper support can cause excessive bending which may damage the appearance or finish of the product.** Any short cut lengths should also be carried on edge while supporting the material. See below for details.

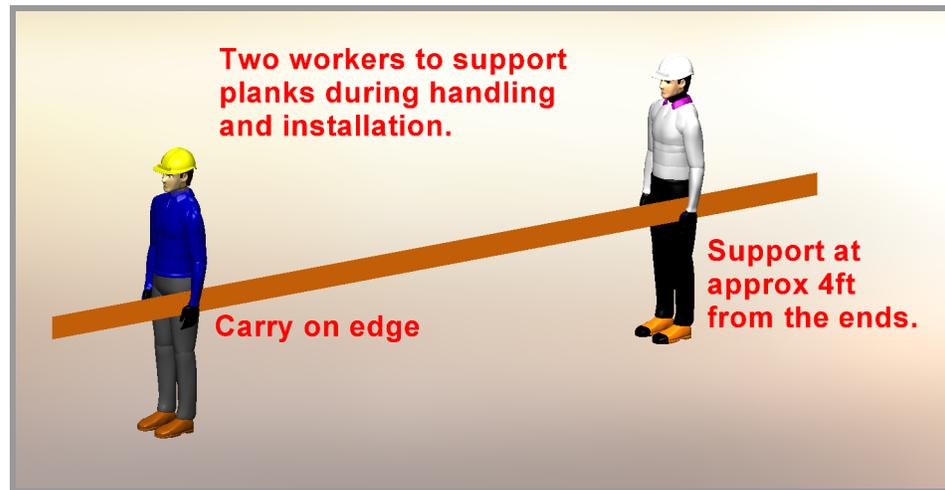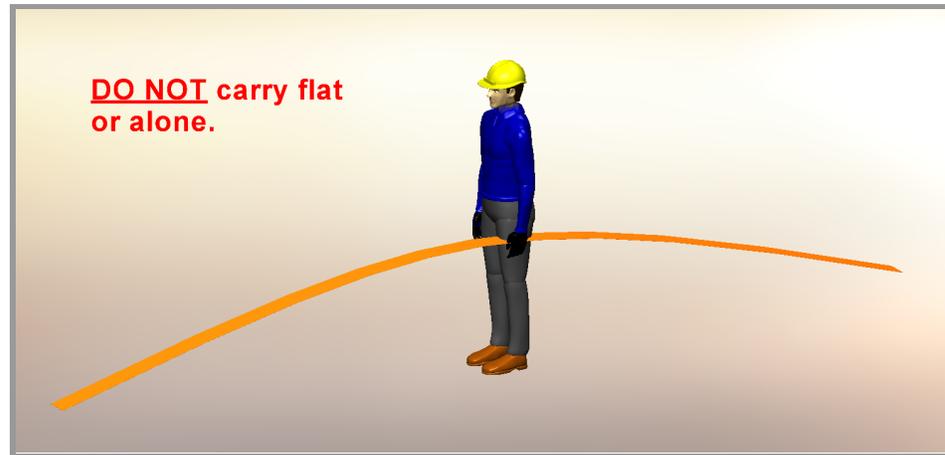

### ⚠️ Delivery, Storage & Handling ⚠️

- Always inspect the delivery for damage and contact LB ASAP if there are any issues: [info@longboardproducts.com](mailto:info@longboardproducts.com) or 1-800-604-0343 and include your PO# and any pictures if possible. Longboard is not responsible for the installation of blemished or damaged material.
- Be sure to store the material flat, keep it dry, safe & secure and remain in unopened cartons until ready to be installed.
- Always wear appropriate PPE when handling products.



# BLANK PAGE



Longboard Architectural Products Inc.  
© Longboard Architectural Products Inc. All rights reserved.

Longboard® is a registered trademark of Longboard Architectural Products Inc.

Longboard  
1777 Clearbrook Road  
Abbotsford, BC V2T 8X8  
Canada  
[longboardproducts.com](http://longboardproducts.com)

Every effort has been made to ensure that the information in these installation guidelines are accurate. Longboard is not responsible for printing or clerical errors.

For more information, contact client care at [info@longboardproducts.com](mailto:info@longboardproducts.com) or call toll free 1-800-604-0343.

## Tongue & Groove Systems

### V-Groove Planks

Size	* 48 sq. ft. box quantities		‡ 96 sq. ft. box quantities	
	12' *	24' *	12' Perf *	24' Perf *
2½"	3V.145	-	3VP.145	-
4"	4V.145	4V.289	-	-
6"	6V.145	6V.289	6VP.145	6VP.289

### Smooth Planks

Size	12' *	24' *	12' Perf *	24' Perf *
6"	6PSP.145	6PSP.289	6PSPP.145	6PSPP.289

### Channel Planks

Size	12' *	24' *	12' Perf *	24' Perf *
6"	6CH.145	6CH.289	-	-

### Bevel Planks

Size	12' *	24' *	12' Perf *	24' Perf *
6" Single	6SB.145	6SB.289	-	-
6" Triple	6TB.145	6TB.289	-	-

### Castellation Planks

Size	12' *	24' *	12' Perf *	24' Perf *
4"	4CA.145	4CA.289	-	-
8"	8CA.145	8CA.289	-	-

## Trim Components

Type	Style	Product	Dimensions	SKU
Starter	Precision	Starter J-Track	(5/8") - 12'	1SJT.145
Starter	Traditional	Starter Strip	(1-7/8") - 12'	2SS.145
Starter	Traditional	Back-to-Back Starter Strip	(1-1/4")	2BTBSS.145
J-Track	Precision	Two Piece J-Track	(5/8") - 12'	1X1JT.145
J-Track	Precision	J-Track	(5/8") - 12'	1JT.145
J-Track	Craftsman	J-Track	(7/8") - 12'	1JT23.145
J-Track	Craftsman	Two Piece J-Track	(7/8") - 12'	JT23S.145
J-Track	Traditional	Two Piece J-Track	(1-3/8") - 12'	1X2JT.145
Corner	Precision	Outside Corner	(3/16") - 12'	05OC.145
Corner	Craftsman	Inside Corner	(3/4") - 12'	1IC.145
Corner	Craftsman	Outside Corner	(1") - 12'	1OC.145
Corner	Traditional	Corner Set	(2") - 12'	2CORS.145
Corner	Traditional	3" Smooth	(3") - 24'	3SCP.289
Corner	Traditional	3" V-Groove	(3") - 24'	3SVP.289
Reveal	Precision	Flat Reveal	(1/2") - 12'	1FR.145
Reveal	Precision	T&G Flat Reveal	(1/2") - 24'	1TGRF.289
Reveal	Craftsman	U-Reveal Set	(3/4") - 12'	1URS.145
Reveal	Craftsman	T&G U-Reveal	(3/4) - 24'	1TGURK.289
Reveal	Traditional	U-Reveal Set	(1-1/2") - 12'	2URS.145
Reveal	Traditional	Flat Reveal Set	(1-1/2") - 12'	2FRS.145
Reveal	Traditional	T&G U-Reveal	(1 1/2") - 24'	2TGURK.289
Reveal	Traditional	Offset Flat Reveal Set, J-Track Base	(2") - 12'	2OFFJ.145
Reveal	Traditional	Offset Flat Reveal Set, Termination Base	(2") - 12'	2OFFT.145
Termination	Precision	Termination Set	(5/8") - 12'	1TS.145
Termination	Craftsman	Termination Set	(7/8") - 12'	TS23S.145
Termination	Traditional	Termination Set	(1-3/8") - 12'	2TS.145
Compression Joints	Traditional	Compression Joint	(1-3/8") - 24'	2CJ.289

## Accessories

Product	Qty	SKU
Quick Screen Clips	1750, box	CLIP.N1750
Quick Screen Clips	100, bag	CLIP.N100
Touch Up Pens	N/A	TUP

*Reach out to confirm color with account manager.*

## Acoustical Soundtex® Scrim

Size	12' *	24' *
6" V-Groove Plank	6PSP.145	6PSP.289
6" Smooth Plank	6PSPPA.145	6PSPPA.289



V-Groove Planks



Smooth Planks



Bevel Planks



Castellation Planks



Perforated Planks



Channel Planks



Precision Starter J-Track



Traditional Starter Strip



Traditional Back-to-Back Starter Strip



Precision Two-Piece J-Track



Precision J-Track



Craftsman J-Track



Craftsman Two Piece J-Track



Traditional Two Piece J-Track



Precision Outside Corner



Craftsman Inside Corner



Craftsman Outside Corner



Traditional Corner Set



3" Smooth Corner



3" V Groove Corner



Precision Flat Reveal



Precision T&amp;G Flat Reveal



Craftsman U-Reveal Set



Craftsman T&amp;G U-Reveal



Traditional U-Reveal Set



Traditional Flat Reveal Set



Traditional T&amp;G U-Reveal



Traditional Offset Flat Reveal Set, J-Track Base



Traditional Offset Flat Reveal Set, Termination Base



Precision Termination Set



Craftsman Termination Set



Traditional Termination Set



Traditional Compression Joint

## Link & Lock™ Battens

Size	12'	24'	End Caps (20/box)	End Mounts (20/box)
2"	2X2LL.145	2X2LL.289	2LLEC.2	2LLEM.2
4"	2X4LL.145	2X4LL.289	2LLEC.4	2LLEM.4
6"	2X6LL.145	2X6LL.289	2LLEC.6	2LLEM.6
8"	2X8LL.145	2X8LL.289	2LLEC.8	2LLEM.8

### Link & Lock™ HD Battens

6"	2X6LLHD.145	2X6LLHD.289	2LLHDEC.6	2LLHDEM.6
8"	2X8LLHD.145	2X8LLHD.289	2LLHDEC.8	2LLHDEM.8


### Link & Lock™ Box Battens

4 x 4"	4X4LL.145	4X4LL.289	4LLEC.4	-
4 x 6"	4X6LL.145	4X6LL.289	4LLEC.6	-



Link & Lock™ Box Battens

Mounting Accessories	Qty	SKU
Link & Lock Mounting Clip	48, bag	LLMC.N48
Dewalt® 1/2" Pilot Point Drill Bit	1	DRILLBT.05
24' Link & Lock Internal Stiffener	1	LLSTIFF.289
3M® Double Sided Adhesive Tape - 108'	1, roll	LLTAPE.1296

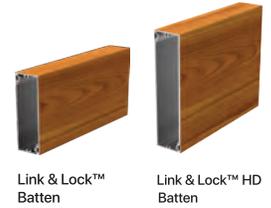

Link & Lock™ Batten

Link & Lock™ HD Batten

### Link & Lock™ Mounting Brackets

Product	Single	Dual
45° LEFT FIXED	LLMBK.45LF	LLMDK.45LF
45° RIGHT FIXED	LLMBK.45RF	LLMDK.45RF
90° CENTER FIXED	LLMBK.90F	LLMDK.90F
45° LEFT SLIDING	LLMBK.45LS	LLMDK.45LS
45° RIGHT SLIDING	LLMBK.45RS	LLMDK.45RS
90° CENTER SLIDING	LLMBK.90S	LLMDK.90S



Single

Dual

Link & Lock™ Mounting Brackets

## Privacy Beam System

Size	Product	24'	End Caps (20/box)
1x3"	Privacy Beam	1X3B.289	1BEC.3
1x5"	Privacy Beam	1X5B.289	1BEC.5
2x2"	Single Post	2X2SP.289	2X2PC.2
2x3"	Double Post	2X3DP.289	2X3PC.3

Mounting Accessories	Qty	SKU
Spacer Block	100, box	2X2SB.N100
1" Spacer Bar Stock Length	1	1X2FB.145
1x3" Spacer Bar	100, box	1X2FB.1
1x5" Spacer Bar	100, box	1X2FB.3
3" Mounting Bracket	100, box	3PSMB.1
#10 Black Screws	100, box	PECS.N100



Privacy Beam

## Dauntless System

Dimensions	Product	12'	24'	End Caps (20/box)
1-5/8" x 4"	Beam	2X4CB.145	2X4CB.289	2BEC.4
1-5/8" x 6"	Beam	2X6B.145	2X6CB.289	2BEC.6

### Hanger Bracket Mounting System

Product	Kind	Qty	SKU
Side Rail	24' Carrier Rail	1	2CBSR.289
Beam Spline Connection Top	Accessory	1	BSCT.6
2" Hanger Bracket	Bracket	1	CBHB.2
4" Hanger Bracket	Bracket	1	CBHB.4
6" Hanger Bracket	Bracket	1	CBHB.6
8" Hanger Bracket	Bracket	1	CBHB.8
10" Hanger Bracket	Bracket	1	CBHB.10
12" Hanger Bracket	Bracket	1	CBHB.12

### Clip Mounting System

Product	Kind	Qty	SKU
Single Rail <sup>A</sup>	24' Carrier Rail	1	CBR.289
Double Rail <sup>A</sup>	24' Carrier Rail	1	CBDR.289
1-1/2" Single Hanger Clip	Clip	20, box	HCS.2
3" Hanger Clip	Clip	20, box	HC.3
Eye Bolt with T-Nuts	Attachment	20, box	CBEB.N20

<sup>A</sup>Includes 7 Eye-Bolts with T-Nuts



Clip Assembly



Hanger Bracket Assembly

# Finishes

## Woodgrains

Woodgrain	15 Year Finsh Warranty	20 Year Finish Warranty
<b>Beechwood</b>	15BEE	-
<b>Black Oak</b>	15BKO	-
<b>Birchwood</b>	15BWD	-
<b>Blonde Oak</b>	15BOK	-
<b>Burnt Cherry</b>	15BCY	-
<b>Dark Acacia</b>	15DAC	20DAC
<b>Dark Antique Oak</b>	15DAO	-
<b>Dark Bamboo</b>	15DBB	20DBB
<b>Dark Cherry</b>	15DCY	20DCY
<b>Dark Fir</b>	15DFR	20DFR
<b>Dark Knotty Pine</b>	15DKP	20DKP
<b>Dark National Walnut</b>	15DNW	20DNW
<b>Dark Olive</b>	15DOL	-
<b>Dark Walnut</b>	15DWL	-
<b>Driftwood</b>	15DWO	-
<b>Eirey Douglas</b>	15GDF	-
<b>Grey Hemlock</b>	15GHL	-
<b>Italian Rosewood</b>	15IRW	20IRW
<b>Light Bamboo</b>	15LBB	20LBB
<b>Light Cherry</b>	15LCY	-
<b>Light Fir</b>	15LFR	20LFR
<b>Light National Walnut</b>	15LNW	-
<b>Light Oak</b>	15LOK	-
<b>Light Olive</b>	15LOL	-
<b>National Mahogany</b>	15NMH	20NMH
<b>Southern Yellow Pine</b>	15SYP	-
<b>Table Walnut</b>	15TWL	20LFR
<b>Western Cedar</b>	15WCD	-
<b>White Oak</b>	15WOK	-

## Solid & Specialty

Solid & Specialty	15 Year Finsh Warranty	20 Year Finish Warranty
<b>Anodic Ice</b>	15AIC	20AIC
<b>Biscotti</b>	15BIS	20BIS
<b>Black</b>	15BLA	20BLA
<b>Bone White</b>	15BWH	20BWH
<b>Brick Red</b>	15BRD	20BRD
<b>Burnt Sienna</b>	15BSN	20BSN
<b>Canyon Vista</b>	15CVI	20CVI
<b>Ceramic Clay</b>	15CCL	20CCL
<b>Charcoal</b>	15CHA	20CHA
<b>Chili Pepper</b>	15CHP	20CHP
<b>Classic Bronze</b>	15CBZ	20CBZ
<b>Copper Penny</b>	15CPE	20CPE
<b>Dark Brown</b>	15DBR	20DBR
<b>Graphite</b>	15GRA	20GRA
<b>Medium Blue</b>	15MBL	20MBL
<b>Moonstone</b>	15MOO	20MOO
<b>Old Navy</b>	15ONA	20ONA
<b>Onyx Black</b>	15OBL	20OBL
<b>Platinum Ice</b>	15PIC	20PIC
<b>Slate Grey</b>	15SGR	20SGR
<b>Ultra White</b>	15UWH	20UWH
<b>Venus</b>	15VEN	20VEN

## Naturally Aged Metals

Naturally Aged Metals	15 Year Finsh Warranty	20 Year Finish Warranty
<b>Carbon Mist</b>	15CMI	-
<b>Molten</b>	15MOL	-
<b>Smokey Topaz</b>	15STO	-
<b>Toasted Mocha</b>	15TMO	-

### Example of complete product SKU

6V.289.15DFR  
(Product.Length.Finish)

# Finish Options

## Achieve your vision.

Whether creating a space that offers the warmth and appearance of Woodgrains, or the modern industrialized look of Naturally Aged Metals, we have a finish option for you.

Require a custom finish or color? Our experienced color-matching team can make it a reality!

Contact us to confirm lead times for orders greater than 15k sq.ft in the Most Popular Finishes category.

## Woodgrains

Longboard's woodgrain finishes have a slight texture with matte sheen.



## Solid & Specialty



**15 Year Non-Prorated Powder Coating Finish - 50 Year Non-Prorated Extruded Aluminum Profiles [ Limited Warranty ]**

**Warranty granted to (building owner):**

Product codes: Product description:

Install contractor

Project name

Project address

Address 2

Install start date

Longboard Architectural Products Inc. ("Longboard," "The Company") products as identified by the Product Codes listed will conform to the standards set out in Clause 1 and Clause 2 of this Warranty, subject to the terms and conditions set out in Clause 3 and 4 of this Warranty.

Finish:

Date of completion

**Clause 1**

Extruded Aluminum Profile(s) with Powder Coat Finish Longboard expressly warrants that its product line is free from manufacturing defects in material or workmanship.

- 1.1 When product is applied according to Longboard instructions and properly maintained, such product is guaranteed against the following:
- 1.2 Buckling: The product itself will be free of any buckling that is not associated with the substrate and/or structure to which the Longboard system is attached. For the purpose of this warranty, buckling shall be defined as warping of the product(s) exceeding one sixteenth of an inch out of plane per linear foot.
- 1.3 Corrosion: When installed in normal atmospheric conditions according to Longboard instructions and properly maintained, such product is further guaranteed against rusting and corroding. Subject to the limitations set out in Clause 3 and 4.
- 1.4 What we will do: If, during the fifteen (15) year Limited Warranty Period on the powder coating finish, the Product is defective in material or workmanship, Longboard will, in its sole discretion, either repair or replace the defective portion of the Product.
- 1.5 What we will do: If, during the fifty (50) year Limited Warranty Period on the extruded aluminum profiles, the Product is defective in material or workmanship, Longboard will, in its sole discretion, either repair or replace the defective portion of the Product.
- 1.6 After the 15th year, this Limited Warranty on the powder coated finish will expire and shall no longer be applicable.
- 1.7 After the 50th year, this Limited Warranty on the aluminum extruded profile(s) will expire and shall no longer be applicable.
- 1.8 Longboard replacement of the defective Product or reimbursement of this Limited Warranty is the exclusive remedy for the Covered Person for any defect in materials or workmanship. The Company will pay for all reasonable costs including material and labor as it relates to the repair and / or replacement of the defective Product.

**Clause 2**

Product Finish - AAMA 2604 Performance Specification

- 2.1 During the first fifteen (15) years of this warranty:
- 2.2 Checking/Cracking: No visible checking or cracking of the product finish on the building.
- 2.3 Chalking Resistance: No chalking of the product finish on the building in excess of that represented by No.8 rating based on ASTM D4214.
- 2.4 Color Retention: No color change of the product finish on the building greater than 5 (five) CIE Lab ΔE units calculated in accordance with ASTM 2244 Section 6.3. Color change shall be measured on the exposed paint surface which has been cleaned of oil, grease, chalk, oxidized film or other contaminants, corresponding values shall be measured on the control panel.
- 2.5 Gloss Retention: Coated surface will exhibit gloss retention of a minimum of 30% of the original. Gloss retention shall

be measured on the exposed paint surface which has been cleaned of oil, grease, chalk, oxidized film or other contaminants, corresponding values shall be measured on the control panel.

- 2.6 Adhesion: Adhesion of product finish when initially applied to test panels and measured by reference to AAMA 2604-02 Clause 7.4.2 will show no removal of the film.

**Clause 3**

- 3.1 Warranty Terms and Conditions:
- 3.2 The "Warranty Period" for the warranties in Clause 1 shall mean the respective number of years or for as long as the Covered Person commencing on the date of substantial completion named above shall live and own the property on which the material was originally installed.
- 3.3 Registration of the product is required within ninety (90) days from substantial completion for the warranty to be in effect. This warranty is valid for the original owner and one other subsequent owner of the structure where the product(s) have been installed.
- 3.4 Normal atmospheric conditions exclude corrosive or aggressive atmospheres such as those contaminated with chemical fumes or other corrosive elements. The product finish is not meant for marine use on boats, ships or offshore platforms.
- 3.5 The product finish warranties as outlined in Clause 2 shall include coverage of the finish as it relates to the impact affects from hail and woodpecker birds.
- 3.6 Under no circumstance shall Longboard's liability under this limited warranty exceed 2.5 times the total corresponding Longboard material cost (excluding sales tax, labor and installation related costs) as noted on the original purchase invoice and paid by the Buyer for the specific project.

**Clause 4**

- 4.1 This warranty will not extend or cover:
- 4.2 Damages to the coated metal caused by handling, shipping, processing and/or installation; or
- 4.3 Damages to the coated metal caused by scratching or abrading after installation; or
- 4.4 Damages to the coated metal as a result of standing water in horizontal installations.
- 4.5 The warranty will not be applicable to damage or failure, which is caused by acts of God, falling objects, external forces, explosions, fire, riots, civil commotion's, acts of war, or other such similar or dissimilar occurrences beyond The Company's control.
- 4.6 Customer shall make available to The Company the dates of the installation of the coated metal, the maintenance records including details of washing and cleaning procedures in compliance with the cleaning requirements as stated in the Required Maintenance section of this warranty. Customers shall demonstrate that the failure of the coated metal was due to a breach of the warranty stated herein.
- 4.7 Claims must be made in writing to Longboard within 30 days of the discovery of a problem and authorization obtained prior to beginning any repair and/or refinishing work.

The claimant must provide proof of coverage. Claims can be made by writing to Longboard at the Product Performance Department. After receiving such notice, The Company must be given a reasonable opportunity to inspect and verify the claim.

- 4.8 Longboard exclusive liability under this warranty, or otherwise, will be limited to refinishing and/or repairing, at The Company's sole discretion, the defective powder coated product. The warranty on any refinished, repaired or replaced coated metal supplied hereunder shall be for the remainder of the warranty period applicable to the originally coated metal. All warranty work will be performed by a company or contractor selected by Longboard. Color variance between refinished and/or repainted product and original shall not be indicative of a defect.
- 4.9 This warranty represents the entire agreement between parties in relation to its subject matter and supersedes any previous agreement whether written or oral between the parties in relation to its subject matter. The limited warranties state the entire liability of Longboard with respect to the products covered by them. The Company shall have no liability for any incidental or consequential damages. No person is authorized to make any representation or warranty on behalf of Longboard except as expressly set forth above, and any such statement shall not be binding on The Company. Except as expressly set forth above, Longboard makes no warranty of any kind, express or implied, including, without limitation, any implied warranty of merchantability or fitness for a particular purpose. Warranties shall be the duration of the limited warranty, or such shorter duration as provided under applicable local law. These limited warranties give you specific legal rights, and you may also have other rights which vary from area to area.
- 4.10 Nothing in this warranty shall be construed as a warranty of the workmanship of any installer or as imposing on Longboard any liability for unsatisfactory performance caused by faulty workmanship in installation.
- 4.11 It's agreed all parties involved that all claims and disputes relating to this agreement that cannot be settled through negotiation will try in good faith to first settle the dispute by mediation administered by the American Arbitration Association (Construction Industry Mediation Procedures) as a prelude to mandatory binding arbitration. Such binding arbitration is to be conducted and administered by the Construction Industry Arbitration Rules of the American Arbitration Association. Both seller and purchaser agree to share equally in the costs of both mediation and arbitration and that such binding arbitration will be the sole and final remedial action.
- 4.12 Required Maintenance. Depending on the Project Environment, follow the maintenance schedule as outlined in the Longboard Care & Maintenance Guide. Use a soft sponge or cloth, water and mild detergent, non-abrasive soap with the pH range of 5-9 to clean the powder coated area of dirt, grime and other debris. Pressure washing and the use of harsh detergents or chemicals is not recommended. Include in your maintenance records the following: date, time, specific products used, name of maintenance person and their designation, maintenance company name and general condition of the powder coated finish.

**I have read and agree to the terms of the Longboard® Product 15 year powder coated surface and 50 year aluminum extruded profile(s) warranty and acknowledge receipt of a copy of the Warranty Certificate.**

Name of owner or contractor:

Date:

Signature:



Duly authorized on behalf of Longboard:

Name and designation:

Date:

Signature:

## 20 Year Non-Prorated Powder Coating Finish - 50 Year Non-Prorated Extruded Aluminum Profiles [ Limited Warranty ]

### Warranty granted to (building owner):

Product codes: Product description:

Install contractor

Project name

Project address

Address 2

Install start date

Finish:

Date of completion

Longboard Architectural Products Inc. ("Longboard," "The Company") products as identified by the Product Codes listed will conform to the standards set out in Clause 1 and Clause 2 of this Warranty, subject to the terms and conditions set out in Clause 3 and 4 of this Warranty.

### Clause 1

Extruded Aluminum Profile(s) with Powder Coat Finish  
Longboard expressly warrants that its product line is free from manufacturing defects in material or workmanship.

- 1.1. When product is applied according to Longboard instructions and properly maintained, such product is guaranteed against the following:
- 1.2. Buckling: The product itself will be free of any buckling that is not associated with the substrate and/or structure to which the Longboard system is attached. For the purpose of this warranty, buckling shall be defined as warping of the product(s) exceeding one sixteenth of an inch out of plane per linear foot.
- 1.3. Corrosion: When installed in normal atmospheric conditions according to Longboard instructions and properly maintained, such product is further guaranteed against rusting and corroding. Subject to the limitations set out in Clause 3 and 4.
- 1.4. What we will do: If, during the twenty (20) year Limited Warranty Period on the powder coating finish, the Product is defective in material or workmanship, Longboard will, in its sole discretion, either repair or replace the defective portion of the Product.
- 1.5. What we will do: If, during the fifty (50) year Limited Warranty Period on the extruded aluminum profiles, the Product is defective in material or workmanship, Longboard will, in its sole discretion, either repair or replace the defective portion of the Product.
- 1.6. After the 20th year, this Limited Warranty on the powder coated finish will expire and shall no longer be applicable.
- 1.7. After the 50th year, this Limited Warranty on the aluminum extruded profile(s) will expire and shall no longer be applicable.
- 1.8. Longboard replacement of the defective Product or reimbursement of this Limited Warranty is the exclusive remedy for the Covered Person for any defect in materials or workmanship. The Company will pay for all reasonable costs including material and labor as it relates to the repair and / or replacement of the defective Product.

### Clause 2

Product Finish - AAMA 2605 Performance Specification

- 2.1. During the first twenty (20) years of this warranty:
- 2.2. Checking/Cracking: No visible checking or cracking of the product finish on the building.
- 2.3. Chalking Resistance: No chalking of the product finish on the building in excess of that represented by No.8 rating based on ASTM D4214.
- 2.4. Color Retention: No color change of the product finish on the building greater than 5 (five) CIE Lab ΔE units calculated in accordance with ASTM 2244 Section 6.3. Color change shall be measured on the exposed paint surface which has been cleaned of oil, grease, chalk, oxidized film or other contaminants, corresponding values shall be measured on the control panel.
- 2.5. Gloss Retention: Coated surface will exhibit gloss retention of a minimum of 50% of the original. Gloss retention shall

be measured on the exposed paint surface which has been cleaned of oil, grease, chalk, oxidized film or other contaminants, corresponding values shall be measured on the control panel.

- 2.6. Adhesion: Adhesion of product finish when initially applied to test panels and measured by reference to AAMA 2605-02 Clause 7.4.2 will show no removal of the film.

### Clause 3

- 3.1. Warranty Terms and Conditions:
- 3.2. The "Warranty Period" for the warranties in Clause 1 shall mean the respective number of years or for as long as the Covered Person commencing on the date of substantial completion named above shall live and own the property on which the material was originally installed.
- 3.3. Registration of the product is required within ninety (90) days from substantial completion for the warranty to be in effect. This warranty is valid for the original owner and one other subsequent owner of the structure where the product(s) have been installed.
- 3.4. Normal atmospheric conditions exclude corrosive or aggressive atmospheres such as those contaminated with chemical fumes or other corrosive elements. The product finish is not meant for marine use on boats, ships or offshore platforms.
- 3.5. The product finish warranties as outlined in Clause 2 shall include coverage of the finish as it relates to the impact affects from hail and woodpecker birds.
- 3.6. Under no circumstance shall Longboard's liability under this limited warranty exceed 2.5 times the total corresponding Longboard material cost (excluding sales tax, labor and installation related costs) as noted on the original purchase invoice and paid by the Buyer for the specific project.

### Clause 4

- 4.1. This warranty will not extend or cover:
- 4.2. Damages to the coated metal caused by handling, shipping, processing and/or installation; or
- 4.3. Damages to the coated metal caused by scratching or abrading after installation; or
- 4.4. Damages to the coated metal as a result of standing water in horizontal installations.
- 4.5. The warranty will not be applicable to damage or failure, which is caused by acts of God, falling objects, external forces, explosions, fire, riots, civil commotion's, acts of war, or other such similar or dissimilar occurrences beyond The Company's control.
- 4.6. Customer shall make available to The Company the dates of the installation of the coated metal, the maintenance records including details of washing and cleaning procedures in compliance with the cleaning requirements as stated in the Required Maintenance section of this warranty. Customers shall demonstrate that the failure of the coated metal was due to a breach of the warranty stated herein.
- 4.7. Claims must be made in writing to Longboard within 30 days of the discovery of a problem and authorization obtained prior to beginning any repair and/or refinishing work.

The claimant must provide proof of coverage. Claims can be made by writing to Longboard at the Product Performance Department. After receiving such notice, The Company must be given a reasonable opportunity to inspect and verify the claim.

- 4.8. Longboard exclusive liability under this warranty, or otherwise, will be limited to refinishing and/or repairing, at The Company's sole discretion, the defective powder coated product. The warranty on any refinished, repaired or replaced coated metal supplied hereunder shall be for the remainder of the warranty period applicable to the originally coated metal. All warranty work will be performed by a company or contractor selected by Longboard. Color variance between refinished and/or repainted product and original shall not be indicative of a defect.
- 4.9. This warranty represents the entire agreement between parties in relation to its subject matter and supercedes any previous agreement whether written or oral between the parties in relation to its subject matter. The limited warranties state the entire liability of Longboard with respect to the products covered by them. The Company shall have no liability for any incidental or consequential damages. No person is authorized to make any representation or warranty on behalf of Longboard except as expressly set forth above, and any such statement shall not be binding on The Company. Except as expressly set forth above, Longboard makes no warranty of any kind, express or implied, including, without limitation, any implied warranty of merchantability or fitness for a particular purpose. Warranties shall be the duration of the limited warranty, or such shorter duration as provided under applicable local law. These limited warranties give you specific legal rights, and you may also have other rights which vary from area to area.
- 4.10. Nothing in this warranty shall be construed as a warranty of the workmanship of any installer or as imposing on Longboard any liability for unsatisfactory performance caused by faulty workmanship in installation.
- 4.11. It's agreed all parties involved that all claims and disputes relating to this agreement that cannot be settled through negotiation will try in good faith to first settle the dispute by mediation administered by the American Arbitration Association (Construction Industry Mediation Procedures) as a prelude to mandatory binding arbitration. Such binding arbitration is to be conducted and administered by the Construction Industry Arbitration Rules of the American Arbitration Association. Both seller and purchaser agree to share equally in the costs of both mediation and arbitration and that such binding arbitration will be the sole and final remedial action.
- 4.12. Required Maintenance. Depending on the Project Environment, follow the maintenance schedule as outlined in the Longboard Care & Maintenance Guide. Use a soft sponge or cloth, water and mild detergent, non-abrasive soap with the pH range of 5-9 to clean the powder coated area of dirt, grime and other debris. Pressure washing and the use of harsh detergents or chemicals is not recommended. Include in your maintenance records the following: date, time, specific products used, name of maintenance person and their designation, maintenance company name and general condition of the powder coated finish.

**I have read and agree to the terms of the Longboard® Product 15 year powder coated surface and 50 year aluminum extruded profile(s) warranty and acknowledge receipt of a copy of the Warranty Certificate.**

Name of owner or contractor:

Date:

Signature:



Duly authorized on behalf of Longboard:

Name and designation:

Date:

Signature: